


XBA-KZT5 Option Switch Settings

Supported bill KZT 200, 500, 1000, 2000, 5000 5bills.

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★ Reject KZT 200	ON							
★ Accept KZT 200	OFF							
★ Reject KZT 500		ON						
★ Accept KZT 500		OFF						
★ Reject KZT 1000			ON					
★ Accept KZT 1000			OFF					
★ Reject KZT 2000				ON				
★ Accept KZT 2000				OFF				
★ Reject KZT 5000					ON			
★ Accept KZT 5000					OFF			
★ Disable Bill Reject 4 Times BA Stop By 30 Sec						ON		
★ Enable Bill Reject 4 Times BA Stop By 30 Sec						OFF		
★ Stack Banknote when Power-up							ON	
★ Reject Banknote when Power-up							OFF	
★ Reserved								ON
★ Reserved								OFF

This dip switch is located at the side of XBA.

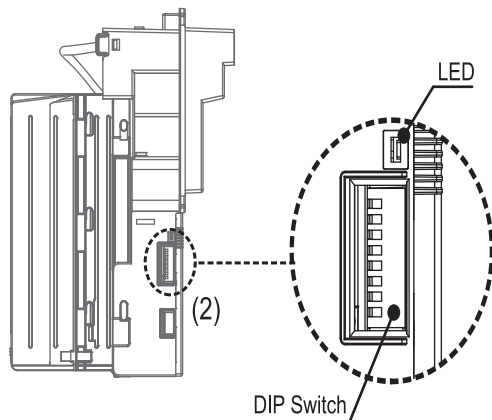

Currency Assign Data

Interface Bill value	Pulse	JPSTD	ccTalk	ICT104U	RS232 A0
BV1	KZT 200	KZT 200	KZT 200	KZT 200	KZT 200
BV2	KZT 500		KZT 500	KZT 500	KZT 500
BV3	KZT 1000		KZT 1000	KZT 1000	KZT 1000
BV4	KZT 2000		KZT 2000	KZT 2000	KZT 2000
BV5	KZT 5000		KZT 5000	KZT 5000	KZT 5000


RS232 A0 INFORMATION

BillType Data	
Code	Denomination
2	KZT 200
3	KZT 500
4	KZT 1000
5	KZT 2000
6	KZT 5000

XBA-KZT5 (Pulse/JPSTD/ICT104U/RS232 A0/ccTalk)

FUNCTION		SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
Pulse Mode			ON						
Other Mode									
★ Inhibit Active HIGH		ON							
★ Inhibit Active LOW		OFF							
★ Reserved			ON						
★ Reserved									
★ 50ms LO / 50ms HI				OFF	OFF				
★ 50ms LO / 100ms HI									
★ 65ms LO / 75ms HI				ON	OFF				
★ 100ms LO / 150ms HI									
★ Credit-Pulse Normal HIGH	ccTalk 16-bit Encryption mode & Restoe Mode.(See Table.1)					ON			
★ Credit-Pulse Normal LOW	ccTalk 16-bit Decrypt mode & 8-bit checksum(See Table.1)					OFF			
★ Pulse Mode							ON		
★ Other Mode							OFF		
★ 1 pulse / KZT 100	ccTalk Mode							OFF	OFF
★ 2 pulses / KZT 100	RS232 A0 Mode							OFF	ON
★ 5 pulses / KZT 100	ICT104U Mode							ON	OFF
★ 20 pulses / KZT 100	JPSTD Mode							ON	ON

This dip switch is located on the CPU board, remove the CPU board cover first.

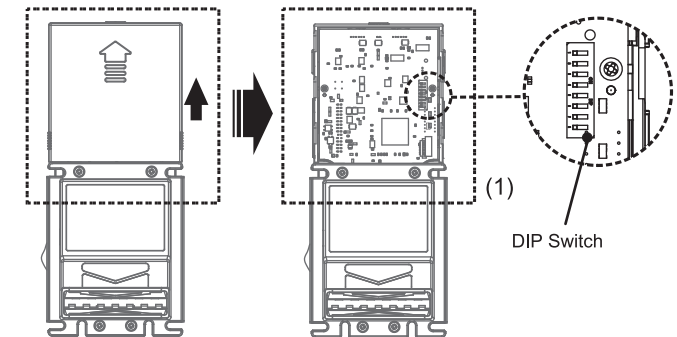

★ Manufacture setting

After setting dip switch of the credit pulses, you should reset the bill acceptor again.

Note : 1.Turn this dip to with restart the bill acceptor will restore.

2.ccTalk address to its default value of 40 and the encryption key to its default value of 123456.

3.Calibration card is needed.

Table 1

SW2 DIP 1	OFF	OFF	ON	★ ON
SW2 DIP 5	OFF	ON	OFF	★ ON
	8-Bit Checksum	Restore mode (Note.2)	CRC 16-Bit Decrypt Checksum	CRC 16-Bit Encryption Checksum