


XBA-TRY6 Option Switch Settings

Supported bill Lira 5, 10, 20, 50, 100, 200 6bills.

	FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★	Reject Lira 5	ON							
★	Accept Lira 5	OFF							
★	Reject Lira 10		ON						
★	Accept Lira 10		OFF						
★	Reject Lira 20			ON					
★	Accept Lira 20			OFF					
★	Reject Lira 50				ON				
★	Accept Lira 50				OFF				
★	Reject Lira 100 & 200					ON			
★	Accept Lira 100 & 200					OFF			
★	Disable Bill Reject 4 Times BA Stop By 30 Sec						ON		
★	Enable Bill Reject 4 Times BA Stop By 30 Sec						OFF		
★	Stack Banknote when Power-up							ON	
★	Reject Banknote when Power-up							OFF	
★	Reserved								ON
★	Reserved								OFF

This dip switch is located at the side of XBA.

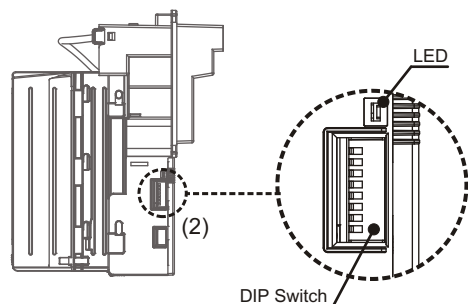

Note.(1) Please reset the bill acceptor after set the dip switch.
 (2) Dip switches 1 to 5 are only used for pulse protocol.
 (3) Calibration card is needed.
 (4) No sleep function
 (5) When Dip 1 is OFF ICT106U ==>
 Lira 5=0x40,Lira 10=0x41,Lira 20=0x42,Lira 50=0x43,
 Lira 100=0x44,Lira 200=0x45
 When Dip 1 is ON ICT106U ==>
 Lira 10=0x40,Lira 20=0x41,Lira 50=0x42,Lira 100=0x43,
 Lira 200=0x44

Currency Assign Data

Interface	Pulse	MDB	ICT104V	ccNet	ICT106U	
					When Dip 1 is OFF	When Dip 1 is ON
Bill value						
BV1	Lira 5	Lira 5	Lira 5	Lira 5	Lira 5	Lira 10
BV2	Lira 10	Lira 10	Lira 10	Lira 10	Lira 10	Lira 20
BV3	Lira 20	Lira 20	Lira 20	Lira 20	Lira 20	Lira 50
BV4	Lira 50	Lira 50	Lira 50	Lira 50	Lira 50	Lira 100
BV5	Lira 100	Lira 100	Lira 100	Lira 100	Lira 100	Lira 200
BV6	Lira 200	Lira 200	Lira 200	Lira 200	Lira 200	

Appendix

XBA-TRY6 (Pulse/MDB/ICT106U/ccNet/ICT104V)

FUNCTION		SW1	SW2	SW3	SW4	SW5		SW6	SW7	SW8	
★	Inhibit Active HIGH	ON									
	Inhibit Active LOW	OFF									
★	Reserved		ON								
	Reserved		OFF								
★	Reserved			ON							
	Reserved			OFF							
★	Reserved				ON						
	Reserved				OFF						
★	Pulse Mode	MDB Mode		ccNet Mode		ICT104V Mode					
	Credit-Pulse Normal HIGH	SCALING_FACTOR 100 DECIMAL_PLACE_OFF 2		9600 Baud Rate		Connect with coin changer					ON
★	Credit-Pulse Normal LOW	SCALING_FACTOR 1 DECIMAL_PLACE_OFF 0		19200 Baud Rate		Connect with ICT VCCS converter board		OFF			
	Pulse Mode										ON
★	Other Mode								OFF		
	Pulse Mode			Other Mode							
★	1 pulse / Lira 5			MDB Mode						OFF	OFF
	5 pulses / Lira 5			ICT106U Mode						OFF	ON
	10 pulses / Lira 5			ccNet Mode						ON	OFF
	25 pulses / Lira 5			ICT104V Mode						ON	ON

★ Manufacture setting

This dip switch is located on the CPU board, remove the CPU board cover first.

