

A7/V7 Option Switch Settings

Supported bill Col\$ 1000(01), 2000(01), 5000(98), 10000(98),
20000(99), 50000(01) 6bills.



A7/V7 dip-switch settings and functions:

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8	SW1	SW2	SW3	SW4
Reject Col\$ 1000 & 2000	ON											
Accept Col\$ 1000 & 2000	OFF											
Reject Col\$ 5000		ON										
Accept Col\$ 5000		OFF										
Reject Col\$ 10000			ON									
Accept Col\$ 10000			OFF									
Reject Col\$ 20000				ON								
Accept Col\$ 20000				OFF								
Reject Col\$ 50000					ON							
Accept Col\$ 50000					OFF							
High Acceptance						ON						
High Security						OFF						
Harness disable							ON					
Harness enable							OFF					
Inhibit Active High								ON				
Inhibit Active Low								OFF				
1 pulse / 1000 pesos									OFF	OFF		
2 pulse / 1000 pesos									ON	OFF		
4 pulse / 1000 pesos									OFF	ON		
20 pulse / 1000 pesos									ON	ON		
Pulse Speed	50ms on / 50ms off										OFF	OFF
	60ms on / 300ms off										ON	OFF
	30ms on / 50ms off										OFF	ON
	150ms on / 150ms off										ON	ON

◆ Factory configuration has all switches in the OFF position.

Note : (1) Reset the bill acceptor after setting the dip switch.

(2) SW7 and SW8 of the 8-switch DIP and the 4-switch DIP are for pulse protocol only.

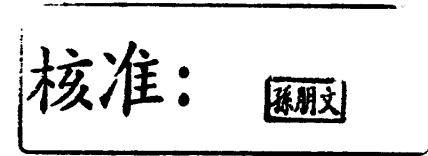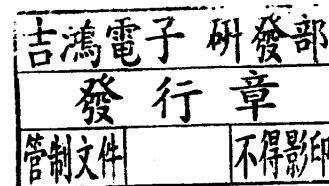

05.2.23

A7/V7 Option Switch Settings

Supported bill Col\$ 1000(01), 2000(97, 98, 99, 01, 02), 5000(96, 97, 98),
10000(96, 97, 98), 20000(96, 98, 99), 50000(00, 01) 6bills.

A7/V7 dip-switch settings and functions:

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8	SW1	SW2	SW3	SW4
Reject Col\$ 1000 & 2000	ON											
Accept Col\$ 1000 & 2000	OFF											
Reject Col\$ 5000		ON										
Accept Col\$ 5000		OFF										
Reject Col\$ 10000			ON									
Accept Col\$ 10000			OFF									
Reject Col\$ 20000				ON								
Accept Col\$ 20000				OFF								
Reject Col\$ 50000					ON							
Accept Col\$ 50000					OFF							
High Acceptance						ON						
High Security						OFF						
Harness disable							ON					
Harness enable							OFF					
Inhibit Active High								ON				
Inhibit Active Low								OFF				
1 pulse / 1000 pesos									OFF	OFF		
2 pulse / 1000 pesos									ON	OFF		
4 pulse / 1000 pesos									OFF	ON		
20 pulse / 1000 pesos									ON	ON		
Pulse Speed	50ms on / 50ms off								OFF	OFF		
	60ms on / 300ms off								ON	OFF		
	30ms on / 50ms off								OFF	ON		
	150ms on / 150ms off								ON	ON		

◆ Factory configuration has all switches in the OFF position.

Note : (1) Reset the bill acceptor after setting the dip switch.

(2) SW7 and SW8 of the 8-switch DIP and the 4-switch DIP are for pulse protocol only.

Appendix