

A7/V7-SIT5



A7/V7 Option Switch Settings

Supported bill Tolar 10(92), 20(92), 50(92), 100(92, 03), 200(01) 5bills.

A7/V7 dip-switch settings and functions:

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8	SW1	SW2	SW3	SW4
Reject Tolar 10	ON											
Accept Tolar 10	OFF											
Reject Tolar 20		ON										
Accept Tolar 20		OFF										
Reject Tolar 50			ON									
Accept Tolar 50			OFF									
Reject Tolar 100				ON								
Accept Tolar 100				OFF								
Reject Tolar 200					ON							
Accept Tolar 200					OFF							
Reserved						ON						
Reserved						OFF						
Harness disable							ON					
Harness enable							OFF					
Inhibit Active High								ON				
Inhibit Active Low								OFF				
1 pulse / Tolar 10									OFF	OFF		
2 pulse / Tolar 10									ON	OFF		
5 pulse / Tolar 10									OFF	ON		
10 pulse / Tolar 10									ON	ON		
Pulse Speed	50ms on / 50ms off										OFF	OFF
	60ms on / 300ms off										ON	OFF
	30ms on / 50ms off										OFF	ON
	150ms on / 150ms off										ON	ON

- ◆ Factory configuration has all switches in the OFF position.
- Note : (1) Reset the bill acceptor after setting the dip switch.
- (2) SW7 and SW8 of the 8-switch DIP and the 4-switch DIP are for pulse protocol only.

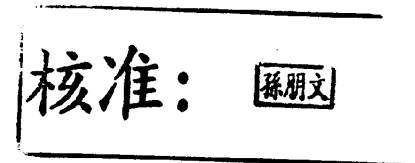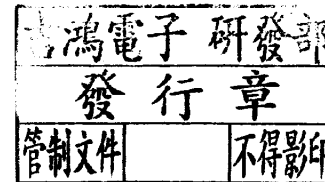

95. 2. 23

Appendix