

**A7/V7-SKK3**



**A7/V7 Option Switch Settings**

Supported bill SK 20(97), 50(99), 100(99) 3bills.

A7/V7 dip-switch settings and functions:

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8	SW1	SW2	SW3	SW4
Reject SK 20	ON											
Accept SK 20	OFF											
Reject SK 50		ON										
Accept SK 50		OFF										
Reject SK 100			ON									
Accept SK 100			OFF									
Reserved				ON								
Reserved				OFF								
Reserved					ON							
Reserved					OFF							
Reserved						ON						
Reserved						OFF						
Harness disable							ON					
Harness enable							OFF					
Inhibit Active High								ON				
Inhibit Active Low								OFF				
1 pulse / SK 10									OFF	OFF		
2 pulse / SK 10									ON	OFF		
4 pulse / SK 10									OFF	ON		
20 pulse / SK 10									ON	ON		
Pulse Speed	50ms on / 50ms off										OFF	OFF
	60ms on / 300ms off										ON	OFF
	30ms on / 50ms off										OFF	ON
	150ms on / 150ms off										ON	ON

- ◆ Factory configuration has all switches in the OFF position.
- Note : (1) Reset the bill acceptor after setting the dip switch.
- (2) SW7 and SW8 of the 8-switch DIP and the 4-switch DIP are for pulse protocol only.

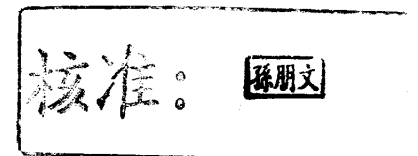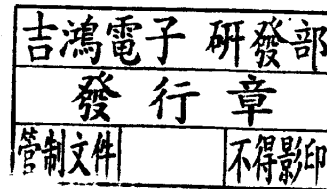

05.02.23

**Appendix**