


CC6100系列

硬币找零器

- 容易更换与模块化的钱管设计，与支持多组合配置的支付系统
- 六个自动补币钱管，有更高的钱币管理能力和更低的人工补币频率
- 支持EVA/DTS查帐数据格式(CC6100SA/CC6100E)
- 红外线更新固件功能(CC6100SA/CC6100E)
- 省电睡眠模式功能(CC6100SA)
- 高效能之硬币管理系统
- 先进的防伪技术

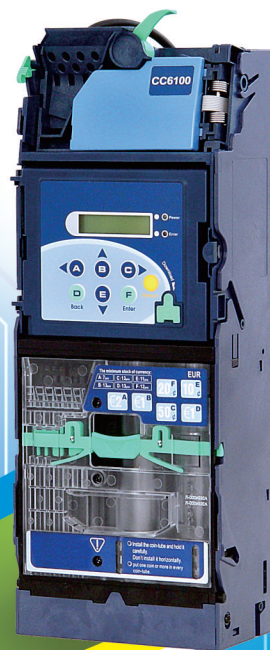

ICT

CC6100 系列

硬币找零器

CC6100系列产品特色:六个钱管可提供最高水准的管理支出与组合灵活性。CC6100支援MDB, JPSTD, Executive/MDB介面, 且支援多种市场与户外机之应用。

产品规格

 吃币率 96% 以上	 耗电流 待机模式: $\leq 3.6W$ 吃币: $\leq 15.6W$ 出币: $\leq 15.6W$ 最大: $36W$ (启动瞬间)
 支援钱币 宽度: 16~28 mm/0.63~1.10 inches 厚度: 1.2~3.2 mm/0.05~0.13 inches	省电模式 省电功率: $\leq 10\mu A$ 待机模式: $\leq 3.6W$
 吃币速度 约1 coin/sec.	 外观尺寸 (H)370.5 x (W)140.6 x (D)82.5 mm/ (H)14.58 x (W)5.53 x (D)3.24 inches
 暂存区功能 <选配> 2枚/1道(TWD)	 重量 约2.05 kg/4.4 lbs
 钱管数 6	 运作环境 运作温度: $-15^{\circ}C/5^{\circ}F$ ~ $60^{\circ}C/140^{\circ}F$ 储存温度: $-30^{\circ}C/-22^{\circ}F$ ~ $70^{\circ}C/158^{\circ}F$ 湿度: 30%~85%RH (无水珠凝结状态)
 支援接口 MDB JPSTD Executive/MDB	 应用产业 室内/户外 自动贩卖机 零售付费
 工作电压 MDB: 20V DC ~ 45V DC MDB: 10V DC ~ 45V DC (CC6100SA) JPSTD: 24V DC $\pm 10\%$ Executive: 24V AC $\pm 10\%$	

⊙ Please refer to ICT website (www.ictgroup.com.tw) for tube assignment.

⊙ JPSTD stands for Japan standard communication interface.

— Specifications are subject to change without prior notice.



吉鸿电子股份有限公司

台北市内湖区民权东路六段15巷28号

Phone: +886-2-2793-1236

Fax: +886-2-2793-6125

E-Mail: sales@ictgroup.com.tw (Product Information)

fae@ictgroup.com.tw (Technical Service)

Website: www.ictgroup.com.tw

