

XBA-BGN11(BGN5+EUR6) Option Switch Settings

Supported bill BGN 2, 5, 10, 20, 50 5bills.
 € 5, 10, 20, 50, 100, 200 6bills.


	FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★	Reject BGN 2 & 5 & 10	ON							
★	Accept BGN 2 & 5 & 10	OFF							
★	Reject BGN 20 & 50		ON						
★	Accept BGN 20 & 50		OFF						
★	Reject € 5 & 10			ON					
★	Accept € 5 & 10			OFF					
★	Reject € 20 & 50				ON				
★	Accept € 20 & 50				OFF				
★	Reject € 100(2019) & 200(2019)				ON				
★	Accept € 100(2019) & 200(2019)				OFF				
★	Disable Bill Reject 4 Times BA Stop By 30 Sec					ON			
★	Enable Bill Reject 4 Times BA Stop By 30 Sec					OFF			
★	Stack Banknote when Power-up							ON	
★	Reject Banknote when Power-up							OFF	
★	Reserved								ON
★	Reserved								OFF

★ Manufacture setting

Currency Assign Data

Interface Bill value	ICT104U	GPT	ICT104V	Pulse	MDB
BV1	BGN 2	BGN 2	BGN 2	BGN 2	BGN 2
BV2	BGN 5	BGN 5	BGN 5	BGN 5	BGN 5
BV3	BGN 10	BGN 10	BGN 10	BGN 10	BGN 10
BV4	BGN 20	BGN 20	BGN 20	BGN 20	BGN 20
BV5	BGN 50		BGN 50	BGN 50	BGN 50
BV6	€ 5		€ 5	€ 5	€ 5
BV7	€ 10		€ 10	€ 10	€ 10
BV8	€ 20		€ 20	€ 20	€ 20
BV9	€ 50		€ 50	€ 50	€ 50
BV10	€ 100		€ 100	€ 100	€ 100
BV11	€ 200		€ 200	€ 200	

This dip switch is located at the side of XBA.

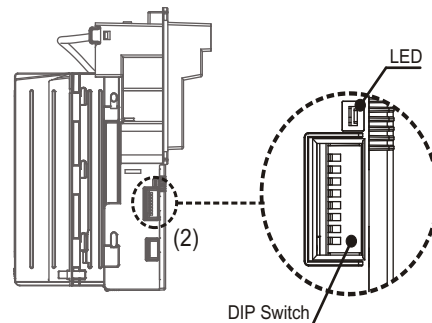

Appendix

XBA-BGN11 (Pulse/MDB/ICT104U/GPT/ICT104V)

	FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8	
★	Inhibit Active HIGH	ON								
	Inhibit Active LOW	OFF								
★	Reserved									ON
	Reserved									OFF
★	Reserved			ON						
	Reserved			OFF						
★	Reserved									ON
	Reserved									OFF
★	Pulse Mode	MDB Mode			ICT104V Mode					
	Credit-Pulse Normal HIGH	Scaling Factor (SF) = 100 Decimal Point Position (DPP) = 2			Connect with coin changer	ON				
	Credit-Pulse Normal LOW	Scaling Factor (SF) = 1 Decimal Point Position (DPP) = 0			Connect with ICT VCCS converter board	OFF				
★	Pulse Mode						ON			
	Other Mode						OFF			
★	Pulse Mode	Other Mode								
	1 pulse / BGN 1	MDB Mode						OFF	OFF	
	5 pulse / BGN 1	GPT Mode						OFF	ON	
	10 pulse / BGN 1	ICT104U Mode						ON	OFF	
	20 pulse / BGN 1	ICT104V Mode						ON	ON	

★ Manufacture setting

After setting dip switch of the credit pulses, you should reset the bill acceptor again.

Note : (1) Please reset the bill acceptor after set the dip switch.

(2) Dip switches 1 to 5 are only used for pulse protocol.

(3) calibrate card

(4) The transaction Record can be saved by USB MSD (only for EX series)

(5) EUR 5 display BGN 10 (Only for Pulse, MDB)


EUR 10 display BGN 20 (Only for Pulse, MDB)

EUR 20 display BGN 40 (Only for Pulse, MDB)

EUR 50 display BGN 100 (Only for Pulse, MDB)

EUR 100 display BGN 200 (Only for Pulse, MDB)

EUR 200 display BGN 400 (Only for Pulse)

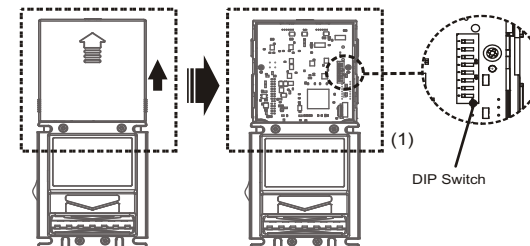

This dip switch is located on the CPU board, remove the CPU board cover first.