

## XBA-IQD3 Option Switch Settings


Supported bill IQD 250, 500, 1000 3bills.

	FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★	Reject IQD 250	ON							
★	Accept IQD 250	OFF							
★	Reject IQD 500		ON						
★	Accept IQD 500		OFF						
★	Reject IQD 1000			ON					
★	Accept IQD 1000			OFF					
★	Reserved				ON				
★	Reserved				OFF				
★	Reserved				ON				
★	Reserved				OFF				
★	Disable Bill Reject 4 Times BA Stop By 30 Sec					ON			
★	Enable Bill Reject 4 Times BA Stop By 30 Sec					OFF			
★	Stack Banknote when Power-up						ON		
★	Reject Banknote when Power-up						OFF		
★	Reserved							ON	
★	Reserved							OFF	

★ Manufacture setting

**Note:** After setting dip switch of the credit pulses, you should reset the bill acceptor again.

This dip switch is located at the side of XBA.

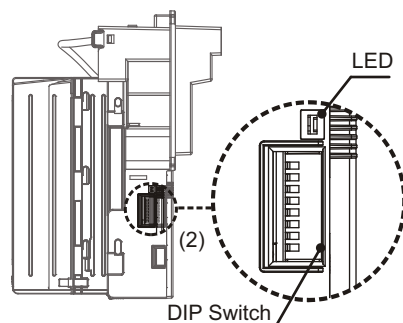

### Currency Assign Data

Interface	ICT104U	GPT	ICT104V	Pulse	MDB
BV1	IQD 250	IQD 250	IQD 250	IQD 250	IQD 250
BV2	IQD 500	IQD 500	IQD 500	IQD 500	IQD 500
BV3	IQD 1000	IQD 1000	IQD 1000	IQD 1000	IQD 1000

## XBA-IQD3 (Pulse/MDB/ICT104U/GPT/ICT104V)

	FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8	
★	Inhibit Active HIGH	ON								
	Inhibit Active LOW	OFF								
★	ENABLE INHIBIT-Sleep Only		ON							
	5 second Timeout Only		OFF							
★	NORMAL (Note: 2)			OFF	OFF					
	MODE 1 (Note: 2)			OFF	ON					
	MODE 2 (Note: 2)			ON	OFF					
	MODE 1+2 (Note: 2)			ON	ON					
★	Pulse Mode	MDB Mode		ICT104V Mode						
	Credit-Pulse Normal HIGH	Scaling Factor (SF)= 1000 Decimal Point Position (DPP)= 3		Connect with coin changer		ON				
★	Credit-Pulse Normal LOW	Scaling Factor (SF)= 1 Decimal Point Position (DPP)= 0		Connect with ICT VCCS converter board		OFF				
	Pulse Mode						ON			
★	Other Mode						OFF			
	Pulse Mode	Other Mode								
★	1 pulse / IQD 250	MDB Mode							OFF	OFF
	5 pulses / IQD 250	GPT Mode							OFF	ON
	10 pulses / IQD 250	ICT104U Mode							ON	OFF
	25 pulses / IQD 250	ICT104V Mode							ON	ON

★ Manufacture setting

**Note:** 1. After setting dip switch of the credit pulses, you should reset the bill acceptor again.

2. NORMAL: No sleep function.

MODE 1 : Bill-acceptor wakes up VMC with banknote only (special cable required).

MODE 2 : VMC wakes up bill-acceptor.

MODE 1+2: Bill-acceptor wakes up with banknote or by VMC.

3. Calibration card is needed.

This dip switch is located on the CPU board, remove the CPU board cover first.

