


XBA-KZT5 Option Switch Settings

Supported bill KZT 200, 500, 1000, 2000, 5000 5bills.

	FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★	Reject KZT 200 (Note.3)	ON							
	Accept KZT 200 (Note.3)	OFF							
★	Reject KZT 500		ON						
★	Accept KZT 500		OFF						
★	Reject KZT 1000			ON					
★	Accept KZT 1000			OFF					
★	Reject KZT 2000				ON				
★	Accept KZT 2000				OFF				
★	Reject KZT 5000				ON				
★	Accept KZT 5000				OFF				
★	Disable Bill Reject 4 Times BA Stop By 30 Sec					ON			
★	Enable Bill Reject 4 Times BA Stop By 30 Sec					OFF			
★	Stack Banknote when Power-up						ON		
★	Reject Banknote when Power-up						OFF		
★	Reserved							ON	
★	Reserved							OFF	

This dip switch is located at the side of XBA.

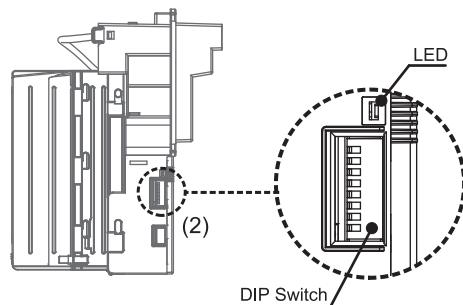

Note : 1.When Dip 1 is OFF ICT106U ==>
KZT 200=0x40,KZT 500=0x41,KZT 1000=0x42,KZT 2000=0x43,KZT 5000=0x44
Pulse ==>KZT 200=2 Pulses ,KZT 500=5 Pulses ,KZT 1000=10 Pulses,
KZT 2000=20 Pulses ,KZT 5000=50 Pulses
When Dip 1 is ON ICT106U ==>KZT 500=0x40,KZT 1000=0x41,
KZT 2000=0x42,KZT 5000=0x43
Pulse ==>KZT 500=1 Pulse,KZT 1000=2 Pulses ,KZT 2000=4 Pulses ,KZT 5000=10 Pulses

Currency Assign Data


Interface	ICT106U		ccNet	ICT104V	Pulse		MDB
	When Dip 1 is OFF	When Dip 1 is ON			When Dip 1 is OFF	When Dip 1 is ON	
BV1	200	500	200	200	200		200
BV2	500	1000	500	500	500	500	500
BV3	1000	2000	1000	1000	1000	1000	1000
BV4	2000	5000	2000	2000	2000	2000	2000
BV5	5000		5000	5000	5000	5000	5000

Appendix

XBA-KZT5 (Pulse/MDB/ICT106U/ccNet/ICT104V)

FUNCTION		SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8	
★	Inhibit Active HIGH	ON								
	Inhibit Active LOW	OFF								
★	Reserved		ON							
	Reserved		OFF							
★	Reserved			ON						
	Reserved			OFF						
★	Reserved				ON					
	Reserved				OFF					
Pulse Mode		MDB Mode		ccNet Mode		ICT104V Mode				
★	Credit-Pulse Normal HIGH	Scaling Factor (SF) = 0.01 Decimal Point Position (DPP) = 0		9600 Baud Rate		Connect with coin changer		ON		
	Credit-Pulse Normal LOW	Scaling Factor (SF) = 1 Decimal Point Position (DPP) = 0		19200 Baud Rate		Connect with ICT VCCS converter board		OFF		
★	Pulse Mode							ON		
	Other Mode							OFF		
★	Pulse Mode			Other Mode						
	1 pulse / KZT 100 & 500 (Note.3)			MDB Mode					OFF	OFF
	2 pulses / KZT 100 & 500 (Note.3)			ICT106U Mode					OFF	ON
	5 pulses / KZT 100 & 500 (Note.3)			ccNet Mode					ON	OFF
	20 pulses / KZT 100 & 500 (Note.3)			ICT104V Mode					ON	ON

This dip switch is located on the CPU board, remove the CPU board cover first.

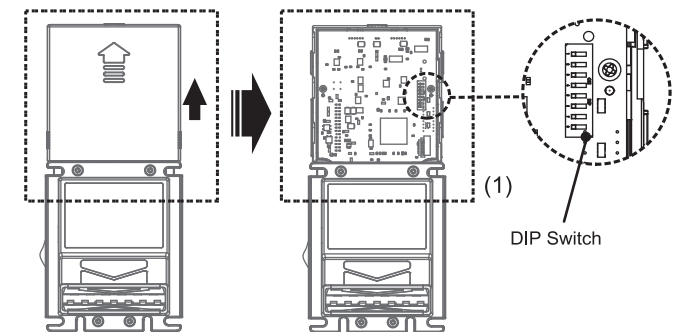

★ Manufacture setting

After setting dip switch of the credit pulses,you should reset the bill acceptor again.

Note : 1.No sleep function.

2.Calibration card is needed.

3.When Dip 1 is OFF ICT106U ==>KZT 200=0x40,KZT 500=0x41,KZT 1000=0x42,

KZT 2000=0x43,KZT 5000=0x44

Pulse ==>KZT 200=2 Pulses ,KZT 500=5 Pulses ,KZT 1000=10 Pulses,

KZT 2000=20 Pulses ,KZT 5000=50 Pulses

When Dip 1 is ON ICT106U ==>KZT 500=0x40,KZT 1000=0x41,

KZT 2000=0x42,KZT 5000=0x43

Pulse ==>KZT 500=1 Pulse ,KZT 1000=2 Pulses ,KZT 2000=4 Pulses,

KZT 5000=10 Pulses

© 2014 International Currency Technologies Corporation

Vol. 5.0 Part Number : SWU5KZ50500-R