


XBA-PHP6 Option Switch Settings

Supported bill PHP 20, 50, 100, 200, 500, 1000 6bills.

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★ Reject PHP 20	ON							
★ Accept PHP 20	OFF							
★ Reject PHP 50		ON						
★ Accept PHP 50		OFF						
★ Reject PHP 100 & 200			ON					
★ Accept PHP 100 & 200			OFF					
★ Reject PHP 500				ON				
★ Accept PHP 500				OFF				
★ Reject PHP 1000					ON			
★ Accept PHP 1000					OFF			
★ Disable Bill Reject 4 Times BA Stop By 30 Sec						ON		
★ Enable Bill Reject 4 Times BA Stop By 30 Sec						OFF		
★ Stack Banknote when Power-up							ON	
★ Reject Banknote when Power-up							OFF	
★ ENABLE IrDA Download								ON
★ Reserved								OFF

This dip switch is located at the side of XBA.

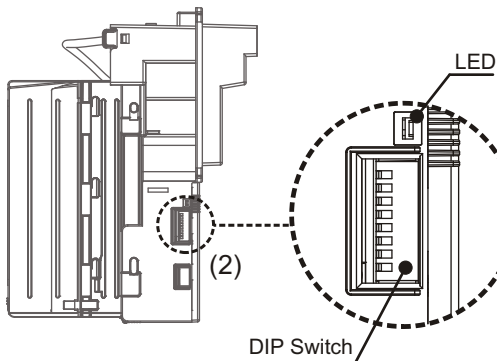

Currency Assign Data

Interface Bill value	Pulse	MDB	ICT104U	ICT104V	ICT002U
BV1	20	20	20	20	20
BV2	50	50	50	50	50
BV3	100	100	100	100	100
BV4	200	200	500	500	500
BV5	500	500	1000	1000	1000
BV6	1000	1000	200	200	200

XBA-PHP6 (Pulse/MDB/ICT)

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
Inhibit Active HIGH	ON							
★ Inhibit Active LOW	OFF							
★ Reserved		ON						
★ Reserved		OFF						
★ Reserved			ON					
★ Reserved			OFF					
★ Reserved				ON				
★ Reserved				OFF				
	Pulse Mode		MDB Mode					
★ Credit-Pulse Normal HIGH	SCALING_FACTOR 100 DECIMAL_PLACE_OFF 2			ON				
★ Credit-Pulse Normal LOW	SCALING_FACTOR 1 DECIMAL_PLACE_OFF 0			OFF				
★ Pulse Mode						ON		
★ Other Mode						OFF		
	Pulse Mode		Other Mode					
★ 1 pulse / PHP 10			MDB Mode				OFF	OFF
★ 5 pulse / PHP 10			ICT002U Mode				OFF	ON
★ 10 pulse / PHP 10			ICT104U Mode				ON	OFF
★ 20 pulse / PHP 10			ICT104V Mode				ON	ON

★ Manufacture setting

Note : 1. After setting dip switch of the credit pulses, you should reset the bill acceptor again.
2. Calibrate card.

This dip switch is located on the CPU board, remove the CPU board cover first.

