


XBA-RUB8 Option Switch Settings

Supported bill RUB 10, 50, 100, 200, 500, 1000, 2000, 5000 8bills.

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★ Reject RUB 10 (Note.3)	ON							
★ Accept RUB 10 (Note.3)	OFF							
★ Reject RUB 50 & 100 & 200		ON						
★ Accept RUB 50 & 100 & 200		OFF						
★ Reject RUB 500 & 1000			ON					
★ Accept RUB 500 & 1000			OFF					
★ Reject RUB 2000				ON				
★ Accept RUB 2000				OFF				
★ Reject RUB 5000					ON			
★ Accept RUB 5000					OFF			
★ Disable Bill Reject 4 Times BA Stop By 30 Sec						ON		
★ Enable Bill Reject 4 Times BA Stop By 30 Sec						OFF		
★ Stack Banknote when Power-up							ON	
★ Reject Banknote when Power-up							OFF	
★ Reserved								ON
★ Reserved								OFF

This dip switch is located at the side of XBA.

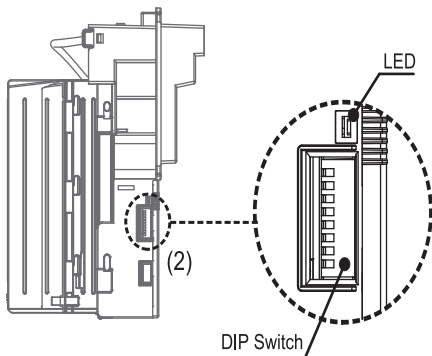

Currency Assign Data

Interface	Pulse	RS232 A0	ICT104U	ccNet	MDB	
					SW1 Dp1 is ON	SW1 Dp1 is OFF
BV1	RUB 10	RUB 10	RUB 10	RUB 10	RUB 50	RUB 10
BV2	RUB 50	RUB 50	RUB 50	RUB 50	RUB 100	RUB 50
BV3	RUB 100	RUB 100	RUB 100	RUB 100	RUB 500	RUB 100
BV4	RUB 500	RUB 500	RUB 500	RUB 500	RUB 1000	RUB 500
BV5	RUB 1000	RUB 1000	RUB 1000	RUB 1000	RUB 5000	RUB 1000
BV6	RUB 5000	RUB 5000	RUB 5000	RUB 5000	RUB 200	
BV7	RUB 200	RUB 200	RUB 200	RUB 200	RUB 2000	RUB 200
BV8	RUB 2000	RUB 2000	RUB 2000	RUB 2000		RUB 2000

RS232 A0 INFORMATION

Code	Denomination
1	RUB 200
2	RUB 2000
3	RUB 10
4	RUB 50
5	RUB 100
6	RUB 500
7	RUB 1000
8	RUB 5000
9	Reserved


Appendix

XBA-RUB8 (Pulse/MDB/RS232 A0/ccNet/ICT104U)

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★ Inhibit Active HIGH	ON							
★ Inhibit Active LOW	OFF							
★ Reserved		ON						
★ Reserved		OFF						
★ Reserved			ON					
★ Reserved			OFF					
★ Reserved				ON				
★ Reserved				OFF				
	Pulse Mode	MDB Mode	ccNet Mode					
★ Credit-Pulse Normal HIGH	Scaling Factor (SF) = 100 Decimal Point Position(DPP) = 2		9600 Baud Rate		ON			
★ Credit-Pulse Normal LOW	Scaling Factor (SF) = 1 Decimal Point Position(DPP) = 0		19200 Baud Rate		OFF			
★ Pulse Mode						ON		
★ Other Mode						OFF		
★ MDB Mode	1 pulse / RUB 10(Dip1:OFF) & RUB 50(Dip1:ON)					OFF	OFF	
★ RS232 A0 Mode	5 pulses / RUB 10(Dip1:OFF) & RUB 50(Dip1:ON)					OFF	ON	
★ ccNet Mode	10 pulses / RUB 10(Dip1:OFF) & RUB 50(Dip1:ON)					ON	OFF	
★ ICT104U Mode	25 pulses / RUB 10(Dip1:OFF) & RUB 50(Dip1:ON)					ON	ON	

★ Manufacture setting

This dip switch is located on the CPU board, remove the CPU board cover first.

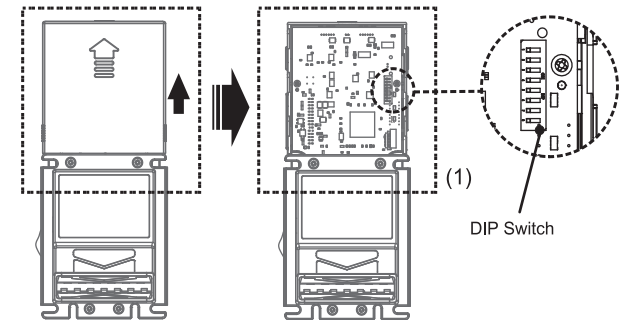

After setting dip switch of the credit pulses, you should reset the bill acceptor again.

Note : (1) Please reset the bill acceptor after set the dip switch.

(2) Calibration card is needed.

(3) Pulse Mode:

When Dip 1 is OFF, One Pulse per 10 P.

When Dip 1 is ON, One Pulse per 50 P.