


XBA-TWD4 Option Switch Settings

Supported bill \$ 100, 200, 500, 1000 4bills.

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★ Reject \$ 100	ON							
★ Accept \$ 100	OFF							
★ Reject \$ 200		ON						
★ Accept \$ 200		OFF						
★ Reject \$ 500			ON					
★ Accept \$ 500			OFF					
★ Reject \$ 1000				ON				
★ Accept \$ 1000				OFF				
★ Reserved					ON			
★ Reserved					OFF			
★ Disable Bill Reject 4 Times BA Stop By 30 Sec					ON			
★ Enable Bill Reject 4 Times BA Stop By 30 Sec					OFF			
★ Stack Banknote when Power-up						ON		
★ Reject Banknote when Power-up						OFF		
★ Reserved							ON	
★ Reserved							OFF	

This dip switch is located at the side of XBA.

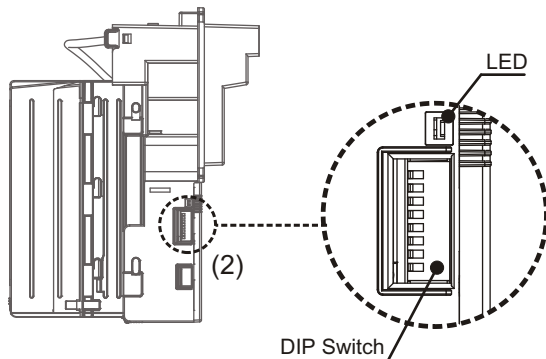


Currency Assign Data

Interface Bill value	EX3000	ICT104U	ICT104V	Pulse	MDB
BV1	\$ 100	\$ 100	\$ 100	\$ 100	\$ 100
BV2	\$ 200	\$ 200	\$ 200	\$ 200	\$ 200
BV3	\$ 500	\$ 500	\$ 500	\$ 500	\$ 500
BV4	\$ 1000	\$ 1000	\$ 1000	\$ 1000	\$ 1000

XBA-TWD4 (Pulse/MDB/ICT/EX3000)

	FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★	Inhibit Active HIGH	ON							
	Inhibit Active LOW	OFF							
★	Reserved		ON						
	Reserved		OFF						
★	Reserved			ON					
	Reserved			OFF					
★	Reserved				ON				
	Reserved				OFF				
★	Pulse Mode	MDB Mode			ICT104V Mode				
	Credit-Pulse Normal HIGH	Scaling Factor (SF)= 100 Decimal Point Position (DPP)= 2			Connect with coin changer				
★	Credit-Pulse Normal LOW	Scaling Factor (SF)= 1 Decimal Point Position (DPP)= 0			Connect with ICT VCCS converter board		OFF		
	Pulse Mode						ON		
★	Other Mode						OFF		
	Pulse Mode	Other Mode							
★	1 pulse / \$ 100	MDB Mode					OFF	OFF	
	5 pulse / \$ 100	EX3000 Mode					OFF	ON	
	10 pulse / \$ 100	ICT104U Mode					ON	OFF	
	25 pulse / \$ 100	ICT104V Mode					ON	ON	

This dip switch is located on the CPU board, remove the CPU board cover first.

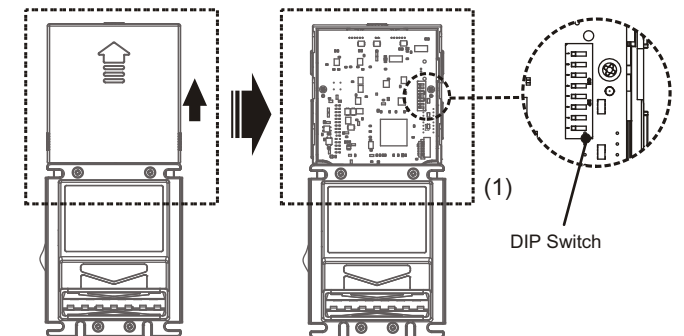

★ Manufacture setting

Note : 1. After setting dip switch of the credit pulses, you should reset the bill acceptor again.
2. Not calibrate card.