


XBA-BGN8(BGN4+EUR4) Option Switch Settings

Supported bill BGN 5, 10, 20, 50 4bills.
EUR 5, 10, 20, 50, 4bills.

	FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★	Reject BGN 5 & 10	ON							
★	Accept BGN 5 & 10	OFF							
★	Reject BGN 20 & 50		ON						
★	Accept BGN 20 & 50		OFF						
★	Reject EUR 5 & 10			ON					
★	Accept EUR 5 & 10			OFF					
★	Reject EUR 20 & 50				ON				
★	Accept EUR 20 & 50				OFF				
★	Reserved					ON			
★	Reserved					OFF			
★	Disable Bill Reject 4 Times BA Stop By 30 Sec						ON		
★	Enable Bill Reject 4 Times BA Stop By 30 Sec						OFF		
★	Stack Banknote when Power-up							ON	
★	Reject Banknote when Power-up							OFF	
★	Reserved								ON
★	Reserved								OFF

This dip switch is located at the side of XBA.

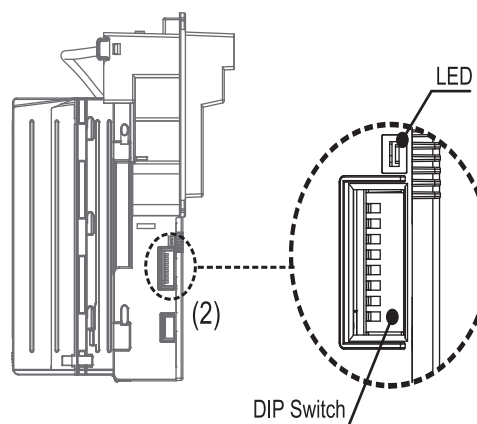

Currency Assign Data

Interface Bill value	Pulse	RS232 A0	ICT104U	ccNet	MDB
BV1	BGN 5	BGN 5	BGN 5	BGN 5	BGN 5
BV2	BGN 10	BGN 10	BGN 10	BGN 10	BGN 10
BV3	BGN 20	BGN 20	BGN 20	BGN 20	BGN 20
BV4	BGN 50	BGN 50	BGN 50	BGN 50	BGN 50
BV5	EUR 5	EUR 5	EUR 5	EUR 5	EUR 5
BV6	EUR 10	EUR 10	EUR 10	EUR 10	EUR 10
BV7	EUR 20	EUR 20	EUR 20	EUR 20	EUR 20
BV8	EUR 50	EUR 50	EUR 50	EUR 50	EUR 50

RS232 A0 INFORMATION

BillType Data		BillType Data	
Code	Denomination	Code	Denomination
1	Reserved	12	EUR 5
2	Reserved	13	EUR 10
3	BGN 5	14	EUR 20
4	BGN 10	15	EUR 50
5	BGN 20		
6	BGN 50		

XBA-BGN8(BGN4+EUR4) (Pulse/MDB/RS232 A0/ccNet/ICT104U)

FUNCTION		SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★	Inhibit Active HIGH	ON							
	Inhibit Active LOW	OFF							
★	Reserved		ON						
	Reserved		OFF						
★	Reserved			ON					
	Reserved			OFF					
★	Reserved				ON				
	Reserved				OFF				
★	Pulse Mode	MDB Mode		ccNet Mode					
	Credit-Pulse Normal HIGH	Scaling Factor (SF) = 100 Decimal Point Position(DPP) = 2		9600 Baud Rate					
★	Credit-Pulse Normal LOW	Scaling Factor (SF) = 1 Decimal Point Position(DPP) = 0		19200 Baud Rate		OFF			
	Pulse Mode								
★	Other Mode						OFF		
	Pulse Mode	Other Mode							
★	1 pulse / BGN 1	MDB Mode						OFF	OFF
	5 pulses / BGN 1	RS232 A0 Mode						OFF	ON
	10 pulses / BGN 1	ccNet Mode						ON	OFF
	20 pulses / BGN 1	ICT104U Mode						ON	ON

★ Manufacture setting

Note :

- (1) Please reset the bill acceptor after set the dip switch.
- (2) Dip switches 1 to 5 are only used for pulse protocol.
- (3) Calibration card is needed.
- (4) EUR \$5 display BGN 9
(Only for Pulse,MDB,ccNet)
EUR \$10 display BGN 18
(Only for Pulse,MDB,ccNet)
EUR \$20 display BGN 36
(Only for Pulse,MDB,ccNet)
EUR \$50 display BGN 90
(Only for Pulse,MDB,ccNet)

This dip switch is located on the CPU board, remove the CPU board cover first.

