


XBA-INR7 Option Switch Settings

Supported bill Rs 5, 10, 20, 50, 100, 200, 500 7bills.

	FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★	Reject Rs 5 (Note.3)	ON							
★	Accept Rs 5 (Note.3)	OFF							
★	Reject Rs 10 & 20		ON						
★	Accept Rs 10 & 20		OFF						
★	Reject Rs 50 & 100			ON					
★	Accept Rs 50 & 100			OFF					
★	Reject Rs 200				ON				
★	Accept Rs 200				OFF				
★	Reject Rs 500					ON			
★	Accept Rs 500					OFF			
★	Reserved						ON		
★	Reserved						OFF		
★	Stack Banknote when Power-up							ON	
★	Reject Banknote when Power-up							OFF	
★	Medium Security								ON
★	High Security								OFF

This dip switch is located at the side of XBA.

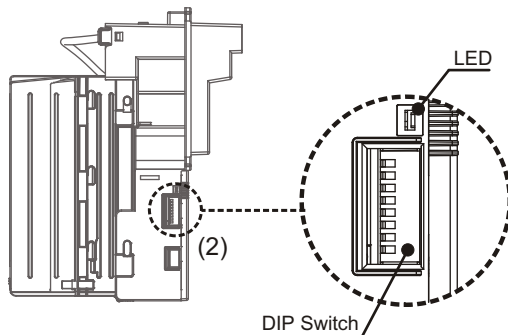


Currency Assign Data

Interface Bill value				Pulse		MDB
	ICT002U	ICT104U	ICT104V	When Dip 1 is ON	When Dip 1 is OFF	
BV1	Rs 5	Rs 5	Rs 5		Rs 5	Rs 5
BV2	Rs 10	Rs 10	Rs 10	Rs 10	Rs 10	Rs 10
BV3	Rs 20	Rs 20	Rs 20	Rs 20	Rs 20	Rs 20
BV4	Rs 50	Rs 50	Rs 50	Rs 50	Rs 50	Rs 50
BV5	Rs 100	Rs 100	Rs 100	Rs 100	Rs 100	Rs 100
BV6	Rs 500	Rs 500	Rs 500	Rs 500	Rs 500	Rs 500
BV7	Rs 200	Rs 200	Rs 200	Rs 200	Rs 200	Rs 200

XBA-INR7 (Pulse/MDB/ICT002U/ICT104U/ICT104V)

	FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★	Inhibit Active HIGH	ON							
	Inhibit Active LOW	OFF							
★	Reserved		ON						
	Reserved		OFF						
★	Reserved			ON					
	Reserved			OFF					
★	Reserved				ON				
	Reserved				OFF				
★	Pulse Mode	MDB Mode			ICT104V Mode				
	Credit-Pulse Normal HIGH	Scaling Factor (SF) = 100 Decimal Point Position (DPP) = 2			Connect with coin changer				
★	Credit-Pulse Normal LOW	Scaling Factor (SF) = 1 Decimal Point Position (DPP) = 0			Connect with ICT VCCS converter board		OFF		
	Pulse Mode						ON		
★	Other Mode						OFF		
★	Pulse Mode					Other Mode			
	1 pulse / Rs 5(Dip 1: OFF) ; Rs 10(Dip 1: ON)					MDB Mode		OFF	OFF
	2 pulse / Rs 5(Dip 1: OFF) ; Rs 10(Dip 1: ON)					ICT002U Mode		OFF	ON
	4 pulse / Rs 5(Dip 1: OFF) ; Rs 10(Dip 1: ON)					ICT104U Mode		ON	OFF
★	20 pulse / Rs 5(Dip 1: OFF) ; Rs 10(Dip 1: ON)					ICT104V Mode		ON	ON

This dip switch is located on the CPU board, remove the CPU board cover first.

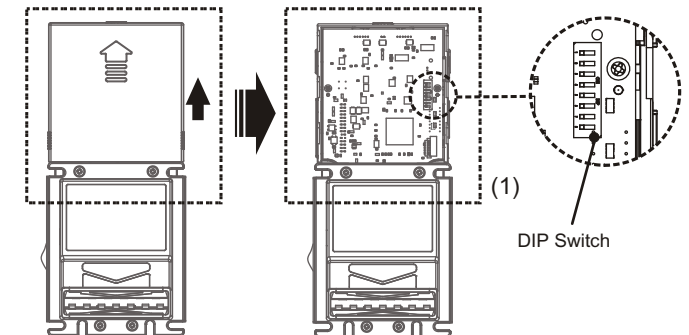

★ Manufacture setting

- Note :
1. After setting dip switch of the credit pulses, you should reset the bill acceptor again.
 2. Calibrate card
 3. Pulse Mode:
When Dip 1 is OFF, One Pulse per Rs 5
When Dip 1 is ON, One Pulse per Rs 10
 4. Medium Security mode will increase accepting rate, however, it will reduce the security level of Bill Acceptor.