


XBA-PHP6 Option Switch Settings

Supported bill PHP 20, 50, 100, 200, 500, 1000 6bills.

	FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★	Reject PHP 20	ON							
★	Accept PHP 20	OFF							
★	Reject PHP 50		ON						
★	Accept PHP 50		OFF						
★	Reject PHP 100			ON					
★	Accept PHP 100			OFF					
★	Reject PHP 200				ON				
★	Accept PHP 200				OFF				
★	Reject PHP 500 & 1000					ON			
★	Accept PHP 500 & 1000					OFF			
★	Disable Bill Reject 4 Times BA Stop By 30 Sec						ON		
★	Enable Bill Reject 4 Times BA Stop By 30 Sec						OFF		
★	Stack Banknote when Power-up							ON	
★	Reject Banknote when Power-up							OFF	
	Reserved								ON
★	Reserved								OFF

This dip switch is located at the side of XBA.

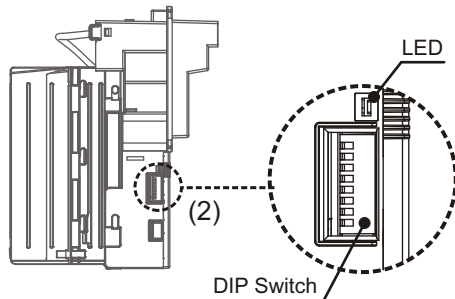

Currency Assign Data

Interface Bill value	Pulse	MDB	ICT104U	ICT104V	ICT002U
BV1	P 20	P 20	P 20	P 20	P 20
BV2	P 50	P 50	P 50	P 50	P 50
BV3	P 100	P 100	P 100	P 100	P 100
BV4	P 200	P 200	P 500	P 500	P 500
BV5	P 500	P 500	P 1000	P 1000	P 1000
BV6	P 1000	P 1000	P 200	P 200	P 200

XBA-PHP6 (Pulse/MDB/ICT002U/ICT104U/ICT104V)

	FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★	Inhibit Active HIGH	ON							
	Inhibit Active LOW	OFF							
★	Reserved		ON						
	Reserved		OFF						
★	Reserved			ON					
	Reserved			OFF					
★	Reserved				ON				
	Reserved				OFF				
★	Pulse Mode	MDB Mode			ICT104V Mode				
	Credit-Pulse Normal HIGH	Scaling Factor (SF) = 100 Decimal Point Position (DPP) = 2			Connect with coin changer	ON			
★	Credit-Pulse Normal LOW	Scaling Factor (SF) = 1 Decimal Point Position (DPP) = 0			Connect with ICT VCCS converter board	OFF			
	Pulse Mode								
★	Other Mode						OFF		
	Pulse Mode	Other Mode							
★	1 pulse / PHP 10	MDB Mode						OFF	OFF
	5 pulses / PHP 10	ICT002U Mode						OFF	ON
★	10 pulses / PHP 10	ICT104U Mode						ON	OFF
	20 pulses / PHP 10	ICT104V Mode						ON	ON

★ Manufacture setting

Note: 1. After setting dip switch of the credit pulses, you should reset the bill acceptor again.
2. Calibrate card.

This dip switch is located on the CPU board, remove the CPU board cover first.

