


XBA-CH&10(CHF4+EUR4+GBP2) Option Switch Settings

Supported bill Fr 10, 20, 50, 100 4bills.
€ 5, 10, 20, 50 4bills.
£ 5, 10 2bills.

	FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★	Reject Fr 10 & 20	ON							
★	Accept Fr 10 & 20	OFF							
★	Reject Fr 50 & 100		ON						
★	Accept Fr 50 & 100		OFF						
★	Reject € 5 & 10			ON					
★	Accept € 5 & 10			OFF					
★	Reject € 20 & 50				ON				
★	Accept € 20 & 50				OFF				
★	Reject £ 5 & 10					ON			
★	Accept £ 5 & 10					OFF			
★	Disable Bill Reject 4 Times BA Stop By 30 Sec						ON		
★	Enable Bill Reject 4 Times BA Stop By 30 Sec						OFF		
★	Stack Banknote when Power-up							ON	
★	Reject Banknote when Power-up							OFF	
★	Reserved								ON
★	Reserved								OFF

This dip switch is located at the side of XBA.

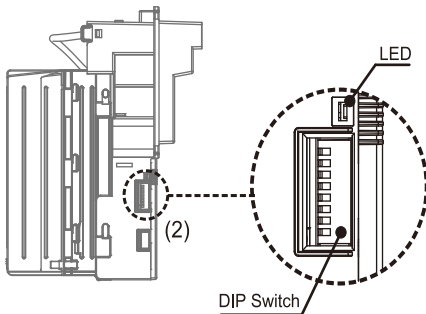

Currency Assign Data


Interface Bill value	ICT104U	ICT104V	Pulse	MDB
BV1	Fr 10	Fr 10	Fr 10	Fr 10
BV2	Fr 20	Fr 20	Fr 20	Fr 20
BV3	Fr 50	Fr 50	Fr 50	Fr 50
BV4	Fr 100	Fr 100	Fr 100	Fr 100
BV5	€ 5	€ 5	€ 5	€ 5
BV6	€ 10	€ 10	€ 10	€ 10
BV7	€ 20	€ 20	€ 20	€ 20
BV8	€ 50	€ 50	€ 50	€ 50
BV9	£ 5	£ 5	£ 5	£ 5
BV10	£ 10	£ 10	£ 10	£ 10

Appendix

XBA-CH&10 (Pulse/MDB/ICT104U/ICT104V)

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
Inhibit Active HIGH	ON							
Inhibit Active LOW	OFF							
Reserved		ON						
Reserved		OFF						
Reserved			ON					
Reserved			OFF					
Reserved				ON				
Reserved				OFF				
Pulse Mode	MDB Mode		ICT104V Mode					
Credit-Pulse Normal HIGH	Scaling Factor (SF) = 100 Decimal Point Position (DPP) = 2		Connect with coin changer			ON		
Credit-Pulse Normal LOW	Scaling Factor (SF) = 1 Decimal Point Position (DPP) = 0		Connect with ICT JPSTD converter board			OFF		
Pulse Mode						ON		
Other Mode						OFF		
Pulse Mode	Other Mode							
1 pulse / Fr 1	MDB Mode						OFF	OFF
5 pulses / Fr 1	Reserved						OFF	ON
10 pulses / Fr 1	ICT104U Mode						ON	OFF
25 pulses / Fr 1	ICT104V Mode						ON	ON

This dip switch is located on the CPU board, remove the CPU board cover first.

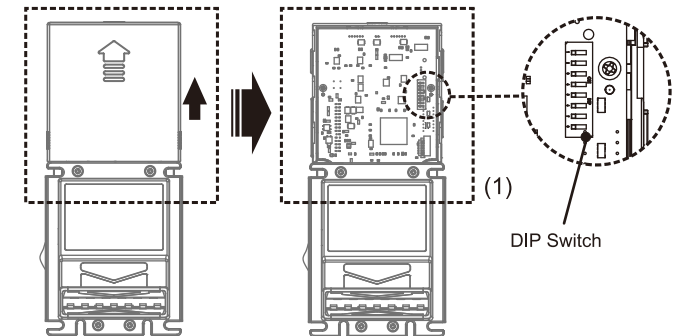

★ Manufacture setting

Note : 1. After setting dip switch of the credit pulses, you should reset the bill acceptor again.
 2. Calibration card is needed.