


XBA-CHF4 Option Switch Settings

Supported bill Fr 10, 20, 50, 100 4bills.

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★ Reject Fr 10	ON							
★ Accept Fr 10	OFF							
★ Reject Fr 20		ON						
★ Accept Fr 20		OFF						
★ Reject Fr 50			ON					
★ Accept Fr 50			OFF					
★ Reject Fr 100				ON				
★ Accept Fr 100				OFF				
★ Reserved					ON			
★ Reserved					OFF			
★ Disable Bill Reject 4 Times BA Stop By 30 Sec						ON		
★ Enable Bill Reject 4 Times BA Stop By 30 Sec						OFF		
★ Stack Banknote when Power-up							ON	
★ Reject Banknote when Power-up							OFF	
★ Reserved								ON
★ Reserved								OFF

This dip switch is located at the side of XBA.

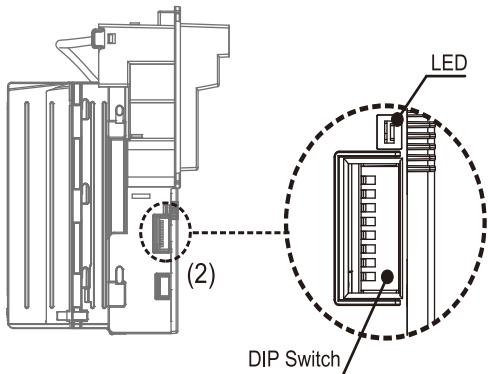


Currency Assign Data

Interface Bill value	ICT104U	ICT104V	Pulse	MDB
BV1	Fr 10	Fr 10	Fr 10	Fr 10
BV2	Fr 20	Fr 20	Fr 20	Fr 20
BV3	Fr 50	Fr 50	Fr 50	Fr 50
BV4	Fr 100	Fr 100	Fr 100	Fr 100

XBA-CHF4 (Pulse/MDB/ICT104U/ICT104V)

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
Inhibit Active HIGH	ON							
★ Inhibit Active LOW	OFF							
★ Reserved		ON						
★ Reserved		OFF						
★ Reserved			ON					
★ Reserved			OFF					
★ Reserved				ON				
★ Reserved				OFF				
	Pulse Mode		MDB Mode		ICT104V Mode			
★ Credit-Pulse Normal HIGH			Scaling Factor (SF) = 100 Decimal Point Position (DPP) = 2		Connect with coin changer			ON
★ Credit-Pulse Normal LOW			Scaling Factor (SF) = 1 Decimal Point Position (DPP) = 0		Connect with ICT JPSTD converter board			OFF
★ Pulse Mode								ON
★ Other Mode								OFF
	Pulse Mode		Other Mode					
★ 1 pulse / Fr 10			MDB Mode					OFF OFF
★ 5 pulse / Fr 10			Reserved					OFF ON
★ 10 pulse / Fr 10			ICT104U Mode					ON OFF
★ 25 pulse / Fr 10			ICT104V Mode					ON ON

This dip switch is located on the CPU board, remove the CPU board cover first.

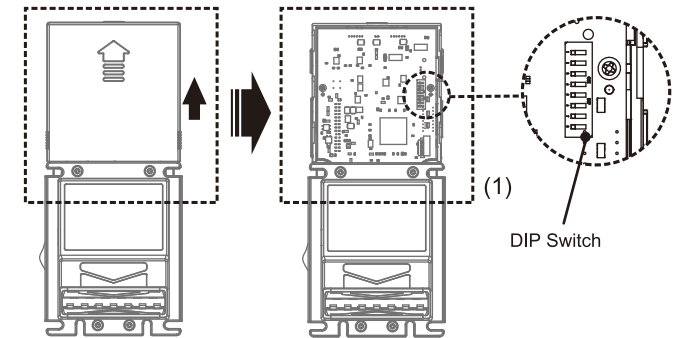

★ Manufacture setting

Note : 1. After setting dip switch of the credit pulses, you should reset the bill acceptor again.
2. Calibration card is needed.