


XBA-EUR6

XBA Option Switch Settings(Pulse/MDB/ICT104U/ICT104V)

Supported bill € 5, 10, 20, 50, 100, 200 6bills.

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★ Reject € 5	ON							
★ Accept € 5	OFF							
★ Reject € 10 & 20		ON						
★ Accept € 10 & 20		OFF						
★ Reject € 50			ON					
★ Accept € 50			OFF					
★ Reject € 100(2019) & 200(2019)				ON				
★ Accept € 100(2019) & 200(2019)				OFF				
★ Reject € 5(2002) & 10(2002)					ON			
★ Accept Normal					OFF			
★ Disable Bill Reject 4 Times BA Stop By 30 Sec						ON		
★ Enable Bill Reject 4 Times BA Stop By 30 Sec						OFF		
★ Stack Banknote when Power-up							ON	
★ Reject Banknote when Power-up							OFF	
★ Reserved								ON
★ Reserved								OFF

This dip switch is located at the side of XBA.

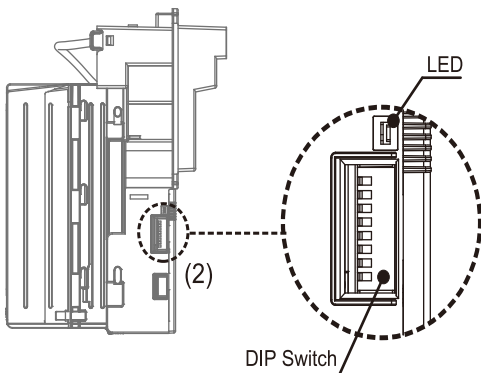


Currency Assign Data

Interface Bill value	ICT104U	ICT104V	Pulse	MDB
BV1	€ 5	€ 5	€ 5	€ 5
BV2	€ 10	€ 10	€ 10	€ 10
BV3	€ 20	€ 20	€ 20	€ 20
BV4	€ 50	€ 50	€ 50	€ 50
BV5	€ 100	€ 100	€ 100	€ 100
BV6	€ 200	€ 200	€ 200	€ 200

XBA-EUR6 (Pulse/MDB/ICT104U/ICT104V)

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8	
Inhibit Active HIGH	ON								
★ Inhibit Active LOW	OFF								
★ Reserved		ON							
★ Reserved		OFF							
★ Reserved			ON						
★ Reserved			OFF						
★ Reserved				ON					
★ Reserved				OFF					
	Pulse Mode		MDB Mode		ICT104V Mode				
★ Credit-Pulse Normal HIGH	Scaling Factor (SF) = 100 Decimal Point Position (DPP) = 2		Connect with coin changer		ON				
★ Credit-Pulse Normal LOW	Scaling Factor (SF) = 1 Decimal Point Position (DPP) = 0		Connect with ICT JPSTD converter board		OFF				
★ Pulse Mode						ON			
★ Other Mode						OFF			
	Pulse Mode		Other Mode						
★ 1 pulse / € 5			MDB Mode					OFF	OFF
★ 5 pulse / € 5			Reserved					OFF	ON
★ 10 pulse / € 5			ICT104U Mode					ON	OFF
★ 25 pulse / € 5			ICT104V Mode					ON	ON

This dip switch is located on the CPU board, remove the CPU board cover first.

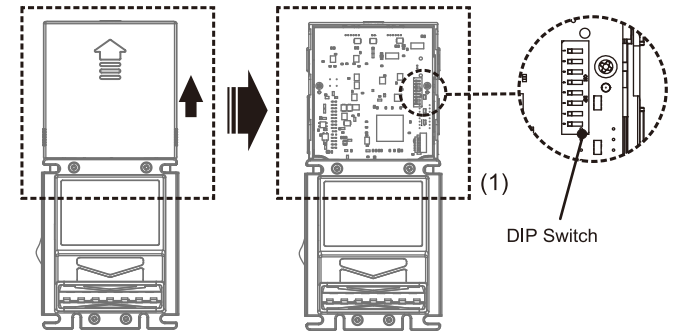

★ Manufacture setting

After setting dip switch of the credit pulses, you should reset the bill acceptor again.

Note : 1.Please reset the bill acceptor after set the dip switch.

2.Calibration card is needed.