


XBA-INR7 Option Switch Settings

Supported bill Rs 5, 10, 20, 50, 100, 200, 500 7bills.

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★ Reject Rs 5 (Note.3)	ON							
★ Accept Rs 5 (Note.3)	OFF							
★ Reject Rs 10 & 20		ON						
★ Accept Rs 10 & 20		OFF						
★ Reject Rs 50 & 100			ON					
★ Accept Rs 50 & 100			OFF					
★ Reject Rs 200				ON				
★ Accept Rs 200				OFF				
★ Reject Rs 500					ON			
★ Accept Rs 500					OFF			
★ Reserved						ON		
★ Reserved						OFF		
★ Stack Banknote when Power-up							ON	
★ Reject Banknote when Power-up							OFF	
★ Medium Security								ON
★ High Security								OFF

This dip switch is located at the side of XBA.

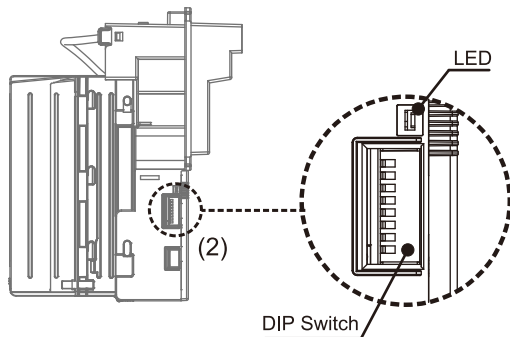


Currency Assign Data

Interface	ICT002U	ICT104U	ICT104V	Pulse		MDB
				When Dip 1 is ON	When Dip 1 is OFF	
BV1	Rs 5	Rs 5	Rs 5	Rs 5	Rs 5	Rs 5
BV2	Rs 10	Rs 10	Rs 10	Rs 10	Rs 10	Rs 10
BV3	Rs 20	Rs 20	Rs 20	Rs 20	Rs 20	Rs 20
BV4	Rs 50	Rs 50	Rs 50	Rs 50	Rs 50	Rs 50
BV5	Rs 100	Rs 100	Rs 100	Rs 100	Rs 100	Rs 100
BV6	Rs 500	Rs 500	Rs 500	Rs 500	Rs 500	Rs 500
BV7	Rs 200	Rs 200	Rs 200	Rs 200	Rs 200	Rs 200

XBA-INR7 (Pulse/MDB/ICT002U/ICT104U/ICT104V)

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8	
Inhibit Active HIGH	ON								
Inhibit Active LOW	OFF								
★ Reserved		ON							
★ Reserved		OFF							
★ Reserved			ON						
★ Reserved			OFF						
★ Reserved				ON					
★ Reserved				OFF					
Pulse Mode	MDB Mode		ICT104V Mode						
Credit-Pulse Normal HIGH	Scaling Factor (SF) = 100 Decimal Point Position (DPP) = 2		Connect with coin changer			ON			
Credit-Pulse Normal LOW	Scaling Factor (SF) = 1 Decimal Point Position (DPP) = 0		Connect with ICT JPSTD converter board			OFF			
★ Pulse Mode						ON			
★ Other Mode						OFF			
Pulse Mode					Other Mode				
1 pulse / Rs 5(Dip 1: OFF) : Rs 10(Dip 1: ON)					MDB Mode			OFF	OFF
2 pulses / Rs 5(Dip 1: OFF) : Rs 10(Dip 1: ON)					ICT002U Mode			OFF	ON
4 pulses / Rs 5(Dip 1: OFF) : Rs 10(Dip 1: ON)					ICT104U Mode			ON	OFF
20 pulses / Rs 5(Dip 1: OFF) : Rs 10(Dip 1: ON)					ICT104V Mode			ON	ON

This dip switch is located on the CPU board, remove the CPU board cover first.

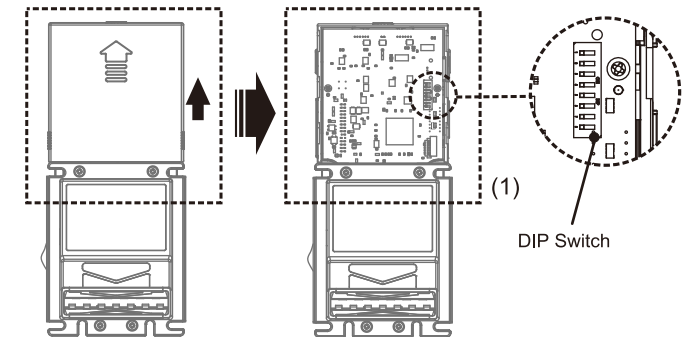

★ Manufacture setting

- Note :
1. After setting dip switch of the credit pulses, you should reset the bill acceptor again.
 2. Calibration card is needed.
 3. Pulse Mode:
When Dip 1 is OFF, One Pulse per Rs 5
When Dip 1 is ON, One Pulse per Rs 10
 4. Medium Security mode will increase accepting rate, however, it will reduce the security level of Bill Acceptor.