


XBA-JMD6 Option Switch Settings

Supported bill JMD 50, 100, 500, 1000, 2000, 5000 6bills.

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★ Reject JMD 50	ON							
★ Accept JMD 50	OFF							
★ Reject JMD 100 & 500		ON						
★ Accept JMD 100 & 500		OFF						
★ Reject JMD 1000			ON					
★ Accept JMD 1000			OFF					
★ Reject JMD 2000				ON				
★ Accept JMD 2000				OFF				
★ Reject JMD 5000					ON			
★ Accept JMD 5000					OFF			
★ Disable Bill Reject 4 Times BA Stop By 30 Sec						ON		
★ Enable Bill Reject 4 Times BA Stop By 30 Sec						OFF		
★ Stack Banknote when Power-up							ON	
★ Reject Banknote when Power-up							OFF	
★ Enable function (Pulse Mode)								ON
★ No Enable function								OFF

This dip switch is located at the side of XBA. **Currency Assign Data**

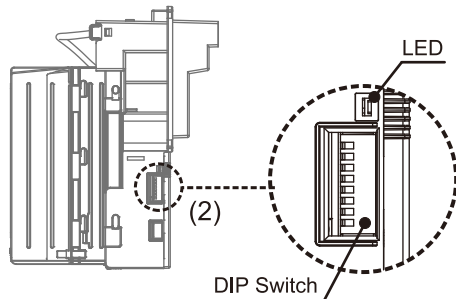

Interface Bill value	ICT002U	ICT104U	ICT104V	Pulse		MDB
				DIP1 OFF	DIP1 ON	
BV1	JMD 50	JMD 50	JMD 50	JMD 50	JMD 100	JMD 50
BV2	JMD 100	JMD 100	JMD 100	JMD 100	JMD 500	JMD 100
BV3	JMD 500	JMD 500	JMD 500	JMD 500	JMD 1000	JMD 500
BV4	JMD 1000	JMD 1000	JMD 1000	JMD 1000	JMD 5000	JMD 1000
BV5	JMD 5000	JMD 5000	JMD 5000	JMD 5000	JMD 2000	JMD 5000
BV6	JMD 2000	JMD 2000	JMD 2000	JMD 2000		JMD 2000

XBA-JMD6 (Pulse/MDB/ICT002U/ICT104U/ICT104V)

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8		
★ Inhibit Active HIGH	ON									
Inhibit Active LOW	OFF									
★ Harness Disable		ON								
★ Harness Enable		OFF								
★ 50ms LO / 50ms HI			OFF	OFF						
60ms LO / 300ms HI			OFF	ON						
30ms LO / 50ms HI			ON	OFF						
150ms LO / 150ms HI			ON	ON						
	Pulse Mode		MDB Mode		ICT104V Mode					
★ Credit-Pulse Normal HIGH	Scaling Factor (SF) = 100 Decimal Point Position (DPP) = 2		Connect with coin changer		ON					
★ Credit-Pulse Normal LOW	Scaling Factor (SF) = 1 Decimal Point Position (DPP) = 0		Connect with ICT JPSTD converter board		OFF					
★ Pulse Mode						ON				
Other Mode						OFF				
	Pulse Mode				Other Mode					
★ 1 pulse / JMD 50 & 100 (Note.2)					MDB Mode				OFF	OFF
2 pulses / JMD 50 & 100 (Note.2)					ICT002U Mode				OFF	ON
4 pulses / JMD 50 & 100 (Note.2)					ICT104U Mode				ON	OFF
20 pulses / JMD 50 & 100 (Note.2)					ICT104V Mode				ON	ON

★ Manufacture setting

After setting dip switch of the credit pulses, you should reset the bill acceptor again.

Note: 1. Calibration card is needed.

2. When DIP1 OFF: 1 pulse/ JMD 50

When DIP1 ON : 1 pulse/ JMD 100

This dip switch is located on the CPU board, remove the CPU board cover first.

