


XBA-MDL9 Option Switch Settings

Supported bill MDL 1, 5, 10, 20, 50, 100, 200, 500, 1000 9bills.

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★ Reject MDL 1 & 5 (Note.3)	ON							
Accept MDL 1 & 5 (Note.3)	OFF							
★ Reject MDL 10 & 20		ON						
★ Accept MDL 10 & 20		OFF						
★ Reject MDL 50			ON					
★ Accept MDL 50			OFF					
★ Reject MDL 100 & 200				ON				
★ Accept MDL 100 & 200				OFF				
★ Reject MDL 500 & 1000					ON			
★ Accept MDL 500 & 1000					OFF			
★ Disable Bill Reject 4 Times BA Stop By 30 Sec						ON		
★ Enable Bill Reject 4 Times BA Stop By 30 Sec						OFF		
★ Stack Banknote when Power-up							ON	
★ Reject Banknote when Power-up							OFF	
★ Reserved								ON
★ Reserved								OFF

This dip switch is located at the side of XBA.

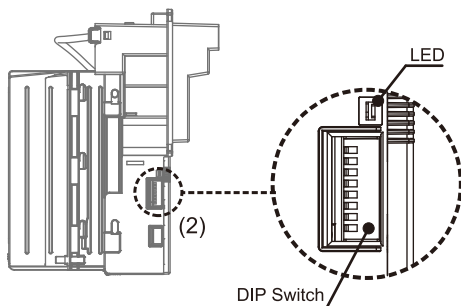


Currency Assign Data

Interface Bill value	Pulse		MDB		ICT106U		ICT104V		ccNet	
	When Dip 1 is OFF	When Dip 1 is ON	When Dip 1 is OFF	When Dip 1 is ON	When Dip 1 is OFF	When Dip 1 is ON	When Dip 1 is OFF	When Dip 1 is ON	When Dip 1 is OFF	When Dip 1 is ON
BV1	1		1	10	1		1		1	
BV2	5		5	20	5		5		5	
BV3	10	10	10	50	10	10	10	10	10	10
BV4	20	20	20	100	20	20	20	20	20	20
BV5	50	50	50	200	50	50	50	50	50	50
BV6	100	100	100	500	100	100	100	100	100	100
BV7	200	200	200	1000	200	200	200	200	200	200
BV8	500	500			500	500	500	500	500	500
BV9	1000	1000			1000	1000	1000	1000	1000	1000

XBA-MDL9 (Pulse/MDB/ICT106U/ccNet/ICT104V)

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8	
Inhibit Active HIGH	ON								
★ Inhibit Active LOW	OFF								
★ Reserved		ON							
★ Reserved		OFF							
★ Reserved			ON						
★ Reserved			OFF						
★ Reserved				ON					
★ Reserved				OFF					
Pulse Mode	MDB Mode		ccNet Mode		ICT104V Mode				
★ Credit-Pulse Normal HIGH	SCALING_FACTOR DECIMAL_PLACE_OFF 100 2		9600 Baud Rate		Connect with coin changer		ON		
★ Credit-Pulse Normal LOW	SCALING_FACTOR DECIMAL_PLACE_OFF 1 0		19200 Baud Rate		Connect with ICT JPSTD converter board		OFF		
★ Pulse Mode							ON		
★ Other Mode							OFF		
Pulse Mode				Other Mode					
★ 1 pulse / MDL 1 & 10 (Note.3)				MDB Mode				OFF	OFF
★ 2 pulses / MDL 1 & 10 (Note.3)				ICT106U Mode				OFF	ON
★ 5 pulses / MDL 1 & 10 (Note.3)				ccNet Mode				ON	OFF
★ 10 pulses / MDL 1 & 10 (Note.3)				ICT104V Mode				ON	ON

This dip switch is located on the CPU board, remove the CPU board cover first.

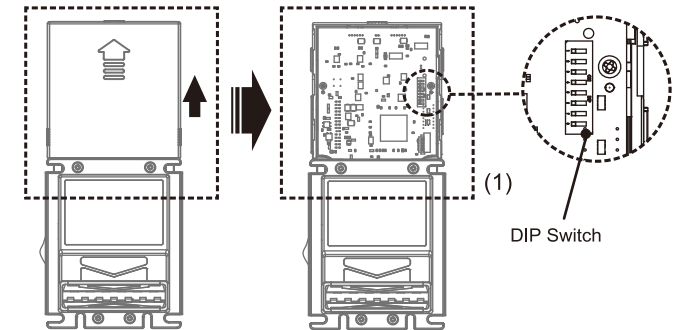

★ Manufacture setting

After setting dip switch of the credit pulses, you should reset the bill acceptor again.

Note.1. Calibration card is needed.

2. No sleep function
3. Dip 1 turn OFF (Pulse Mode: 1 Pulse/1 MDL, MDB Protocol: Reject MDL 500 & 1000)
Dip 1 turn ON (Pulse Mode: 1 Pulse/10 MDL, MDB Protocol: Accept MDL 500 & 1000)