


# XBA-RSD8 Option Switch Settings

Supported bill RSD 10, 20, 50, 100, 200, 500, 1000, 2000 8bills.

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★ Reject RSD 50	ON							
★ Accept RSD 50	OFF							
Reject RSD 100		ON						
★ Accept RSD 100		OFF						
Reject RSD 200 & 500			ON					
★ Accept RSD 200 & 500			OFF					
Reject RSD 1000				ON				
★ Accept RSD 1000				OFF				
Reject RSD 2000					ON			
★ Accept RSD 2000					OFF			
Disable Bill Reject 4 Times BA Stop By 30 Sec						ON		
★ Enable Bill Reject 4 Times BA Stop By 30 Sec						OFF		
Stack Banknote when Power-up							ON	
★ Reject Banknote when Power-up							OFF	
Reject RSD 10 & 20								ON
★ Accept RSD 10 & 20								OFF

This dip switch is located at the side of XBA.

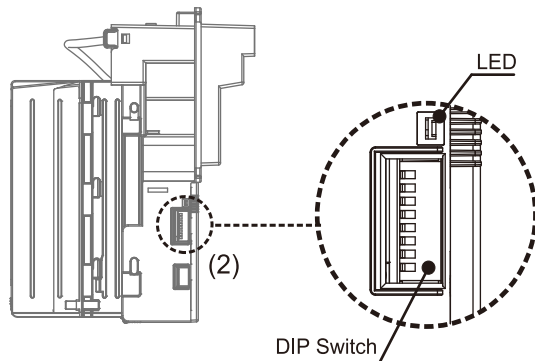

## Currency Assign Data


Interface Bill value	ICT104U	ICT104V	Pulse	MDB
BV1	RSD 10	RSD 10	RSD 10	RSD 10
BV2	RSD 20	RSD 20	RSD 20	RSD 20
BV3	RSD 50	RSD 50	RSD 50	RSD 50
BV4	RSD 100	RSD 100	RSD 100	RSD 100
BV5	RSD 200	RSD 200	RSD 200	RSD 200
BV6	RSD 500	RSD 500	RSD 500	RSD 500
BV7	RSD 1000	RSD 1000	RSD 1000	RSD 1000
BV8	RSD 2000	RSD 2000	RSD 2000	RSD 2000

**Appendix**

# XBA-RSD8 (Pulse/MDB/ICT104U/ICT104V)

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
Inhibit Active HIGH	ON							
★ Inhibit Active LOW	OFF							
Reserved		ON						
★ Reserved		OFF						
Reserved			ON					
★ Reserved			OFF					
Reserved				ON				
★ Reserved				OFF				
<b>Pulse Mode</b>	<b>MDB Mode</b>		<b>ICT104V Mode</b>					
★ Credit-Pulse Normal HIGH	Scaling Factor (SF) = 100 Decimal Point Position (DPP) = 2		Connect with coin changer		ON			
Credit-Pulse Normal LOW	Scaling Factor (SF) = 1 Decimal Point Position (DPP) = 0		Connect with ICT JPSTD converter board		OFF			
★ Pulse Mode						ON		
Other Mode						OFF		
<b>Pulse Mode</b>	<b>Other Mode</b>							
★ 1 pulse / RSD 10	MDB Mode					OFF	OFF	
5 pulses / RSD 10	Reserved					OFF	ON	
10 pulses / RSD 10	ICT104U Mode					ON	OFF	
20 pulses / RSD 10	ICT104V Mode					ON	ON	

This dip switch is located on the CPU board, remove the CPU board cover first.

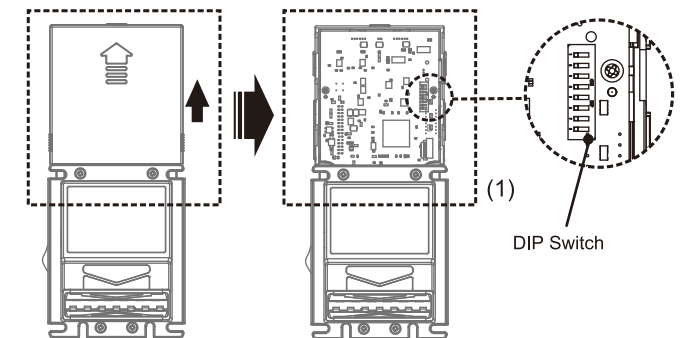

★ Manufacture setting

Note : 1.After setting dip switch of the credit pulses, you should reset the bill acceptor again.  
2.Calibration card is needed.