


XBA-RUB7

XBA Option Switch Settings(Special Pulse/MDB/ICT104U/ICT104V)

Supported bill RUB 50, 100, 200, 500, 1000, 2000, 5000 7bills.

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★ Reject RUB 50 & 100	ON							
★ Accept RUB 50 & 100	OFF							
★ Reject RUB 200		ON						
★ Accept RUB 200		OFF						
★ Reject RUB 500 & 1000			ON					
★ Accept RUB 500 & 1000			OFF					
★ Reject RUB 2000				ON				
★ Accept RUB 2000				OFF				
★ Reject RUB 5000					ON			
★ Accept RUB 5000					OFF			
★ Disable Bill Reject 4 Times BA Stop By 30 Sec						ON		
★ Enable Bill Reject 4 Times BA Stop By 30 Sec						OFF		
★ Stack Banknote when Power-up							ON	
★ Reject Banknote when Power-up							OFF	
★ Reserved								ON
★ Reserved								OFF

This dip switch is located at the side of XBA.

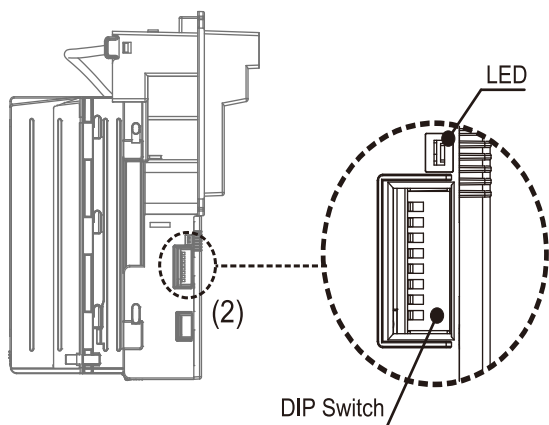


Currency Assign Data

Interface Bill value	ICT104U	ICT104V	Special Pulse	MDB
BV1				
BV2	RUB 50	RUB 50	RUB 50	RUB 50
BV3	RUB 100	RUB 100	RUB 100	RUB 100
BV4	RUB 500	RUB 500	RUB 500	RUB 500
BV5	RUB 1000	RUB 1000	RUB 1000	RUB 1000
BV6	RUB 5000	RUB 5000	RUB 5000	RUB 5000
BV7	RUB 200	RUB 200	RUB 200	RUB 200
BV8	RUB 2000	RUB 2000	RUB 2000	RUB 2000

XBA-RUB7 (Special Pulse/MDB/ICT104U/ICT104V)

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
Inhibit Active HIGH	ON							
Inhibit Active LOW	OFF							
★ Reserved		ON						
★ Reserved		OFF						
★ Reserved			ON					
★ Reserved			OFF					
★ Reserved				ON				
★ Reserved				OFF				
	Pulse Mode		MDB Mode		ICT104V Mode			
★ Credit-Pulse Normal HIGH	Scaling Factor (SF) = 100 Decimal Point Position (DPP) = 2		Connect with coin changer		ON			
★ Credit-Pulse Normal LOW	Scaling Factor (SF) = 1 Decimal Point Position (DPP) = 0		Connect with ICT JPSTD converter board		OFF			
★ Special Pulse Mode						ON		
★ Other Mode						OFF		
	Special Pulse Mode				Other Mode			
★ 1 pulse / Note.3	MDB Mode						OFF	OFF
★ 1 pulse / Note.3	ICT104V Mode						ON	ON
★ 1 pulse / Note.3	Reserved						OFF	ON
★ 1 pulse / Note.3	ICT104U Mode						ON	OFF

This dip switch is located on the CPU board, remove the CPU board cover first.

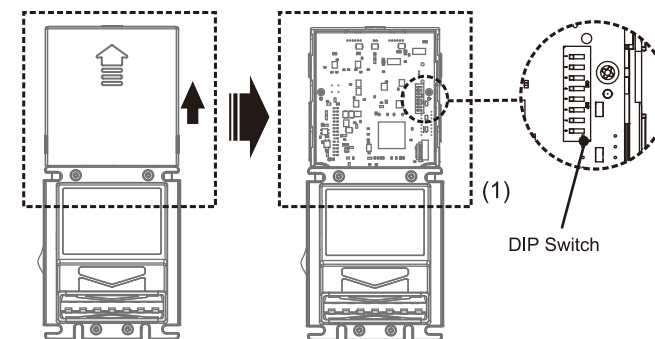

★ Manufacture setting

- After setting dip switch of the credit pulses, you should reset the bill acceptor again.
- Note: 1. After setting dip switch of the credit pulses, you should reset the bill acceptor again.
 2. Calibration card is needed.
 3. Pulse : RUB 50-> 10 Pulses ,RUB 100-> 50 Pulses ,RUB 200-> 100 Pulses ,
 RUB 500-> 250 Pulses ,RUB 1000-> 1250 Pulses ,RUB 2000-> 2500 Pulses ,
 RUB 5000-> 6250 Pulses.