


# XBA-UCD7(USD4+CAD3) Option Switch Settings

Supported bill **USD 1, 5, 10, 20 4bills.**  
**CAD 5, 10, 20 3bills.**

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★ Reject USD 1 & USD / CAD 5	ON							
★ Accept USD 1 & USD / CAD 5	OFF							
★ Reject USD / CAD 10		ON						
★ Accept USD / CAD 10		OFF						
★ Reject USD / CAD 20			ON					
★ Accept USD / CAD 20			OFF					
★ Accept USD+CAD				OFF	OFF			
Accept USD				OFF	ON			
Accept CAD				ON	OFF			
Reserved				ON	ON			
★ Disable Bill Reject 4 Times BA Stop By 30 Sec						ON		
★ Enable Bill Reject 4 Times BA Stop By 30 Sec						OFF		
★ Stack Banknote when Power-up							ON	
★ Reject Banknote when Power-up							OFF	
Reserved								ON
★ Reserved								OFF

This dip switch is located at the side of XBA.

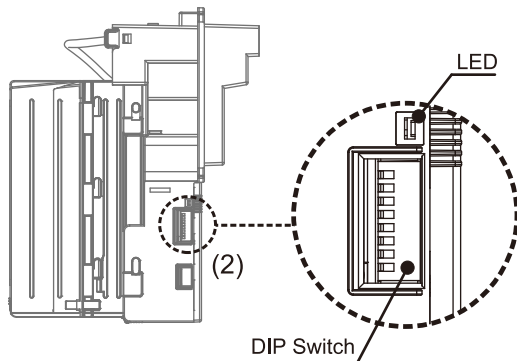

## Currency Assign Data

Interface Bill value	ICT002U	ICT104U	ICT104V	Pulse	MDB
BV1	USD 1	USD 1	USD 1	USD 1	USD 1
BV2	USD 5	USD 5	USD 5	USD 5	USD 5
BV3	USD 10	USD 10	USD 10	USD 10	USD 10
BV4	USD 20	USD 20	USD 20	USD 20	USD 20
BV5	CAD 5	CAD 5	CAD 5	CAD 5	CAD 5
BV6	CAD 10	CAD 10	CAD 10	CAD 10	CAD 10
BV7	CAD 20	CAD 20	CAD 20	CAD 20	CAD 20

## Appendix

# XBA-UCD7(USD4+CAD3)(Pulse/MDB/ICT)

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
Inhibit Active HIGH	ON							
★ Inhibit Active LOW	OFF							
★ Colorful light		OFF	OFF					
★ The green light flashes		OFF	ON					
Reserved		ON	OFF					
No light		ON	ON					
Reserved				ON				
★ Reserved				OFF				
<b>Pulse Mode</b>	<b>MDB Mode</b>		<b>ICT104V Mode</b>					
★ Credit-Pulse Normal HIGH	SCALING_FACTOR 100	DECIMAL_PLACE_OFF 2	Connect with coin change	ON				
★ Credit-Pulse Normal LOW	SCALING_FACTOR 1	DECIMAL_PLACE_OFF 0	Connect with ICT JPSTD Converter board	OFF				
★ Pulse Mode						ON		
Other Mode						OFF		
<b>Pulse Mode</b>	<b>Other Mode</b>							
★ 1 pulse / USD&CAD 1	MDB Mode					OFF	OFF	
2 pulses / USD&CAD 1	ICT002U Mode					OFF	ON	
4 pulses / USD&CAD 1	ICT104U Mode					ON	OFF	
20 pulses / USD&CAD 1	ICT104V Mode					ON	ON	

★ Manufacture setting

After setting dip switch of the credit pulses, you should reset the bill acceptor again.

**Note :** 1. Calibration card is needed.  
 2. 1 USD = 1 CAD

This dip switch is located on the CPU board, remove the CPU board cover first.

