


XBA-UYU7 Option Switch Settings

Supported bill UYU 20, 50, 100, 200, 500, 1000, 2000 7bills.

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★ Reject UYU 20 (Note.5)	ON							
★ Accept UYU 20 (Note.5)	OFF							
★ Reject UYU 50		ON						
★ Accept UYU 50		OFF						
★ Reject UYU 100			ON					
★ Accept UYU 100			OFF					
★ Reject UYU 200 & 500				ON				
★ Accept UYU 200 & 500				OFF				
★ Reject UYU 1000 & 2000					ON			
★ Accept UYU 1000 & 2000					OFF			
★ Disable Bill Reject 4 Times BA Stop By 30 Sec						ON		
★ Enable Bill Reject 4 Times BA Stop By 30 Sec						OFF		
★ Stack Banknote when Power-up							ON	
★ Reject Banknote when Power-up							OFF	
★ Reserved								ON
★ Reserved								OFF

This dip switch is located at the side of XBA.

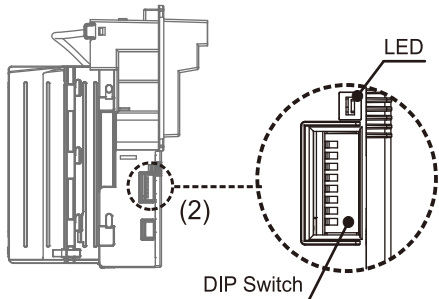

Currency Assign Data

Interface Bill value	ICT002U	ICT104U	ICT104V	Pulse		MDB
				When Dip 1 is OFF	When Dip 1 is ON	
BV1	UYU 20	UYU 20	UYU 20	UYU 20	UYU 20	UYU 20
BV2	UYU 50	UYU 50	UYU 50	UYU 50	UYU 50	UYU 50
BV3	UYU 100	UYU 100	UYU 100	UYU 100	UYU 100	UYU 100
BV4	UYU 200	UYU 200	UYU 200	UYU 200	UYU 200	UYU 200
BV5	UYU 500	UYU 500	UYU 500	UYU 500	UYU 500	UYU 500
BV6	UYU 1000	UYU 1000	UYU 1000	UYU 1000	UYU 1000	UYU 1000
BV7	UYU 2000	UYU 2000	UYU 2000	UYU 2000	UYU 2000	UYU 2000

XBA-UYU7 (Pulse/MDB/ICT002U/ICT104U/ICT104V)

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8	
★ Inhibit Active HIGH	ON								
Inhibit Active LOW	OFF								
★ Reserved		ON							
★ Reserved		OFF							
★ Reserved			ON						
★ Reserved			OFF						
★ Reserved				ON					
★ Reserved				OFF					
	Pulse Mode		MDB Mode		ICT104V Mode				
★ Credit-Pulse Normal HIGH	Scaling Factor (SF) = 100 Decimal Point Position (DPP) = 2		Connect with coin changer		ON				
★ Credit-Pulse Normal LOW	Scaling Factor (SF) = 1 Decimal Point Position (DPP) = 0		Connect with ICT JPSTD converter board		OFF				
★ Pulse Mode						ON			
★ Other Mode						OFF			
	Pulse Mode		Other Mode						
★ 1 pulse / UYU 10 (Note.5)			MDB Mode					OFF	OFF
★ 2 pulses / UYU 10 (Note.5)			ICT002U Mode					OFF	ON
★ 5 pulses / UYU 10 (Note.5)			ICT104U Mode					ON	OFF
★ 10 pulses / UYU 10 (Note.5)			ICT104V Mode					ON	ON

★ Manufacture setting

Note: 1. After setting dip switch of the credit pulses, you should reset the bill acceptor again.

2. Please reset the bill acceptor after set the dip switch.
3. Dip switches 1 to 5 are only used for pulse protocol.
4. Calibration card is needed.
5. Pulse Mode:
Dip 1 turn OFF, One Pulse per UYU 10.
Dip 1 turn ON, One Pulse per UYU 50.

This dip switch is located on the CPU board, remove the CPU board cover first.

