



MF1-C

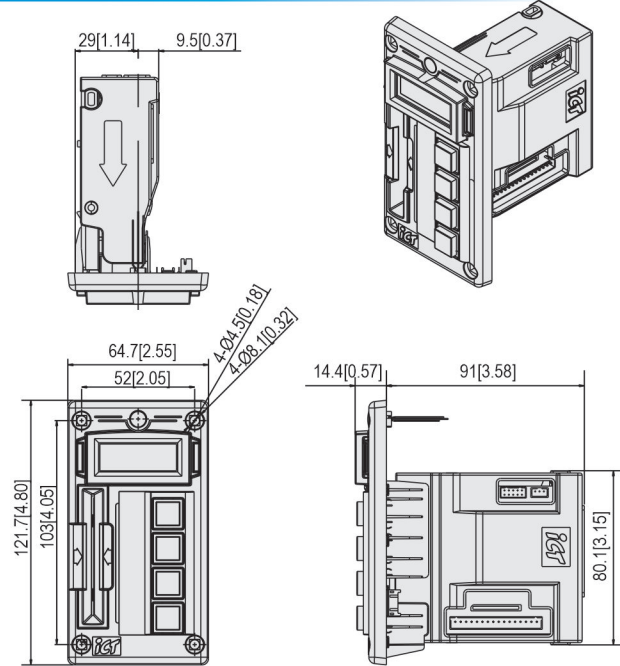


Unit : mm [inch]

MF1-H

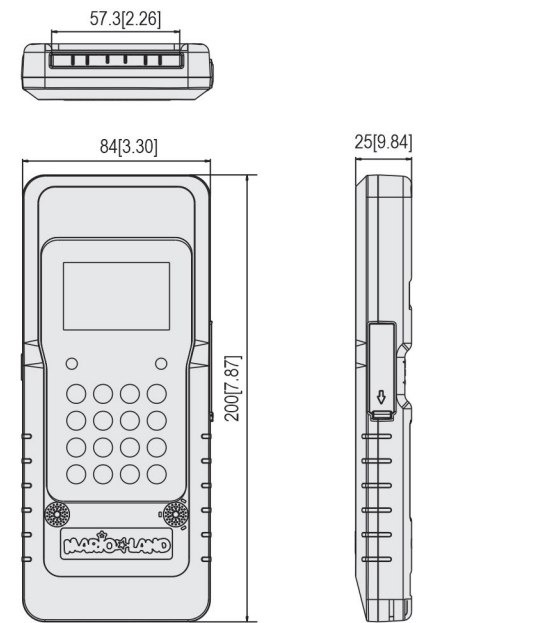


Unit : mm [inch]

MF1-V

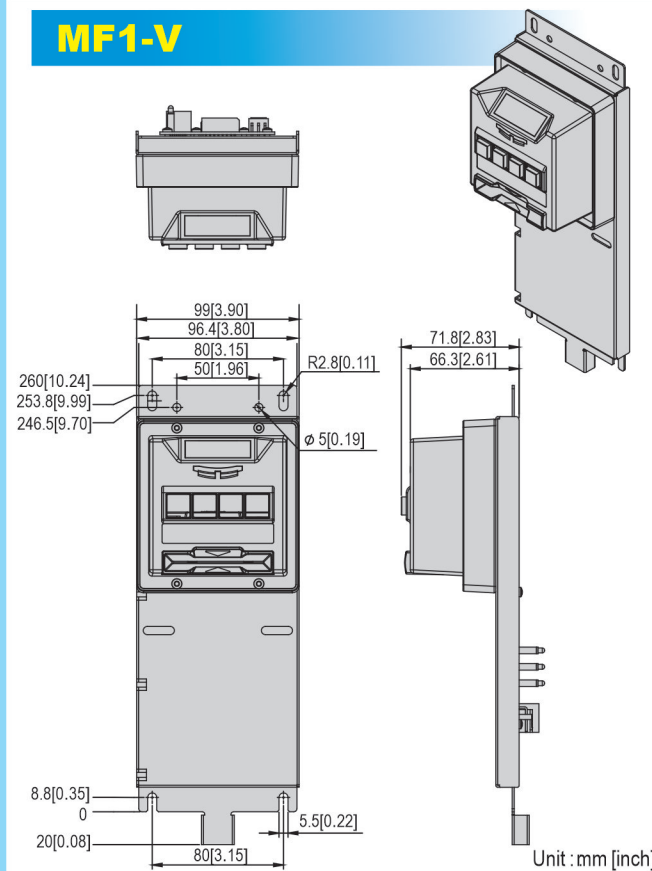

Unit : mm [inch]

MF1-M

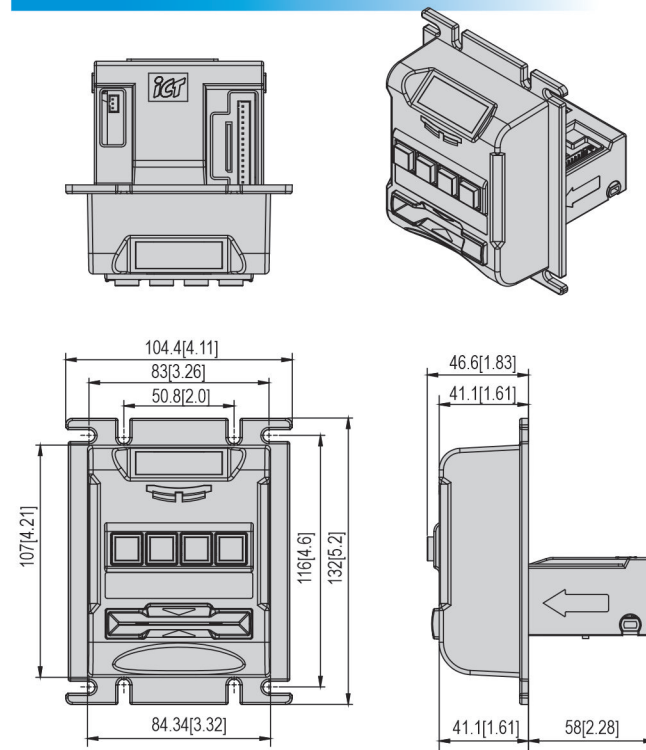

Unit : mm [inch]

A02ENFLMF1-MF1series24



International Currency Technologies

No.28, Ln. 15, Sec. 6, Minquan E. Rd., Neihu Dist., Taipei City 114, Taiwan

Phone: +886-2-2793-1236 · Fax: +886-2-2793-6125

E-Mail: sales@ictgroup.com.tw (Product Information) · fae@ictgroup.com.tw (Technical Service)

Website: www.ictgroup.com.tw

MF1 Series

Smart Card Reader

Specifications

Card

MF1-C/ MF1-M/ MF1-V: Mifare S50
MF1-H: S Card for Supervisor

Read Card Speed(Insert/Leave)

≤0.3sec.

Interfaces

MF1-C: Pulse, RS232
MF1-M: MDB (MDB box)
MF1-V: VCCS (VCCS box)

Connector Port

MF1-H: Mini USB

Power Consumption

MF1 Series: <300mA

Power Input

MF1-C: DC 12V±5%
MF1-M/ MF1-V: DC 24V±5%
MF1-H: DC 5V

Credit Operating

MF1-C/ MF1-M/ MF1-V:
Send Different Credit(Four Push-Button)


Environment Range

Operating Temperature: 0°C~55°C
Storage Temperature: -20°C~70°C
Humidity: 30%~85%RH (no condensation)




Bezel Dimension Compatible to your applications (Easily Switch to MF1 Series Technology)

MF1-C

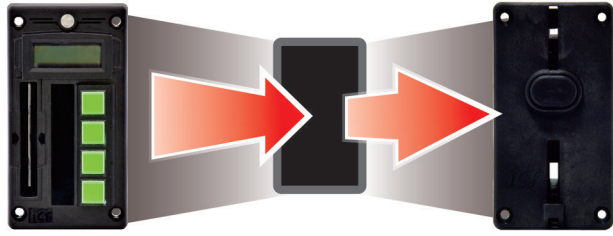


Operation Management (Classification --CMOTAG Card--)

Commander Card

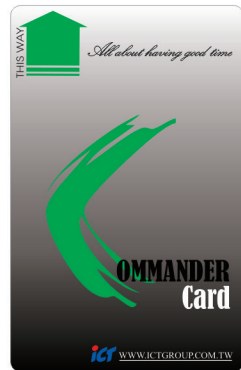


- BOSS Management.

Maintenance Card

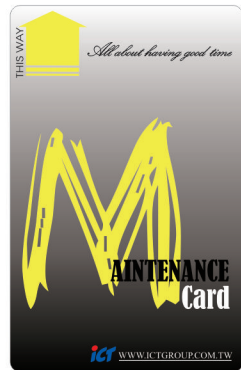


- Technical Management.

Open Card

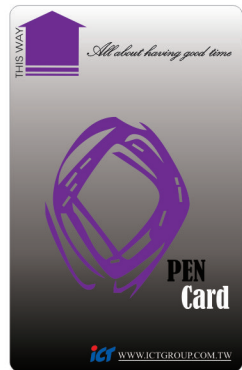

- Power up initial function.

Time Card

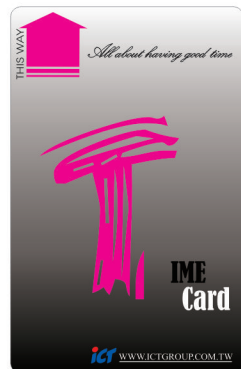

- Setup Reader Date & Time.

Audit Card



- Units Auditing.

Game Card



- Game playing card.

CMOTAG Card Functions (Complete solution to manage business)



	Commander Card	Maintenance Card	Open Card	Time Card	Audit Card	Game Card
Credit Limit Setup	●					
Pulse Setup	●	●				
Store ID & Password	●					
Auditing Function	●	●				
Parameter Data Transferring Function	●	●				
Date/Time Setup Function				●		
Record Clearance Function					●	
Audited-Data Saving Function					●	
Credit Decrement Function						●
Power up Initial function			●			
Credit Renew	●					

Setup Process (Parameter Credit Setup)

