


XBA-CLP4 Option Switch Settings

Supported bill CLP 1000, 2000, 5000, 10000 4bills.

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★ Reject CLP 1000	ON							
★ Accept CLP 1000	OFF							
★ Reject CLP 2000		ON						
★ Accept CLP 2000		OFF						
★ Reject CLP 5000			ON					
★ Accept CLP 5000			OFF					
★ Reject CLP 10000				ON				
★ Accept CLP 10000				OFF				
★ Reserved					ON			
★ Reserved					OFF			
★ Disable Bill Reject 4 Times BA Stop By 30 Sec						ON		
★ Enable Bill Reject 4 Times BA Stop By 30 Sec						OFF		
★ Stack Banknote when Power-up							ON	
★ Reject Banknote when Power-up							OFF	
★ Reserved								ON
★ Reserved								OFF

This dip switch is located at the side of XBA.

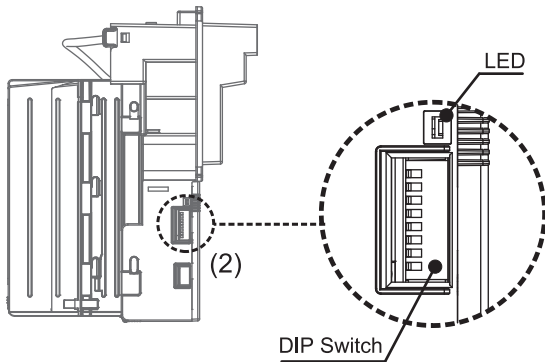


Currency Assign Data

Interface Bill Value	ICT104U	ICT104V	Pulse	MDB
BV1	CLP 1000	CLP 1000	CLP 1000	CLP 1000
BV2	CLP 2000	CLP 2000	CLP 2000	CLP 2000
BV3	CLP 5000	CLP 5000	CLP 5000	CLP 5000
BV4	CLP 10000	CLP 10000	CLP 10000	CLP 10000

XBA-CLP4 (Pulse/MDB/ICT104U/ICT104V)

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8	
Inhibit Active HIGH	ON								
★ Inhibit Active LOW	OFF								
★ Reserved		ON							
★ Reserved		OFF							
★ Reserved			ON						
★ Reserved			OFF						
★ Reserved				ON					
★ Reserved				OFF					
	Pulse Mode		MDB Mode		ICT104V Mode				
★ Credit-Pulse Normal HIGH	Scaling_Factor (SF)=1 Decimal Point Position (DPP)=0		Connect with coin changer		ON				
★ Credit-Pulse Normal LOW	Scaling_Factor (SF)=10 Decimal Point Position (DPP)=1		Connect with ICT VCCS converter board		OFF				
★ Pulse Mode						ON			
★ Other Mode						OFF			
	Pulse Mode		Other Mode						
★ 1 pulse / CLP1000			MDB Mode					OFF	OFF
★ 2 pulses / CLP1000			Reserved					OFF	ON
★ 4 pulses / CLP1000			ICT104U Mode					ON	OFF
★ 20 pulses / CLP1000			ICT104V Mode					ON	ON

This dip switch is located on the CPU board, remove the CPU board cover first.

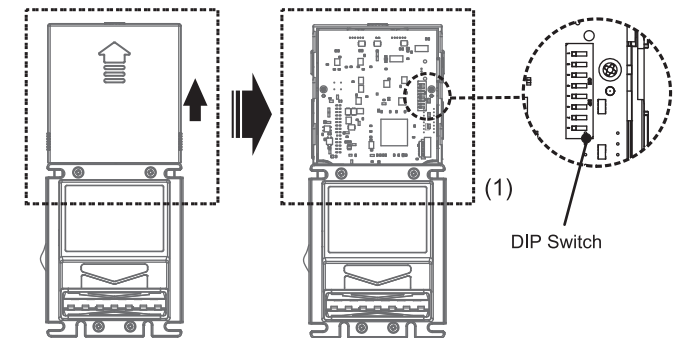

★ Manufacture setting

- Note :
- 1.Please reset the bill acceptor after set the dip switch.
 - 2.Dip switches 1 to 5 are only used for pulse protocol.
 - 3.Calibration card is needed.