

## XBA-GSP2 Option Switch Settings

### Supported bill


England banknotes : England £ 5, £ 10

### Scotland banknotes:

Royal Bank & Bank of Scotland & Clydesdale Bank £ 5, £ 10

	FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★	Accept England & Scotland £ 5	ON							
	Reject England & Scotland £ 5	OFF							
★	Accept England & Scotland £ 10		ON						
	Reject England & Scotland £ 10		OFF						
★	Accept Paper £ 5 & £ 10			ON					
	Reject Paper £ 5 & £ 10			OFF					
★	Reserved				ON				
	Reserved				OFF				
★	Reserved					ON			
	Reserved					OFF			
★	Disable Bill Reject 4 Times BA Stop By 30 Sec						ON		
	Enable Bill Reject 4 Times BA Stop By 30 Sec						OFF		
★	Stack Banknote when Power-up							ON	
	Reject Banknote when Power-up							OFF	
★	Reserved								ON
	Reserved								OFF

This dip switch is located at the side of XBA.

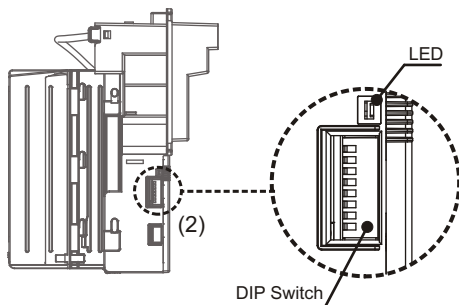


### Currency Assign Data

Interface Bill value	GPT	ICT104U	ICT104V	Pulse	MDB
BV1	£ 5	£ 5	£ 5	£ 5	£ 5
BV2	£ 10	£ 10	£ 10	£ 10	£ 10

## XBA-GSP2 (Pulse/MDB/ICT104U/GPT/ICT104V)

	FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8	
	Inhibit Active HIGH	ON								
★	Inhibit Active LOW	OFF								
	Reserved									ON
★	Reserved									OFF
	Reserved			ON						
★	Reserved			OFF						
	Reserved									ON
★	Reserved									OFF
	<b>Pulse Mode</b>	<b>MDB Mode</b>			<b>ICT104V Mode</b>					
★	Credit-Pulse Normal HIGH	Scaling Factor (SF) = 100 Decimal Point Position (DPP) = 2			Connect with coin changer	ON				
	Credit-Pulse Normal LOW	Scaling Factor (SF) = 1 Decimal Point Position (DPP) = 0			Connect with ICT VCCS converter board	OFF				
★	Pulse Mode						ON			
	Other Mode						OFF			
	<b>Pulse Mode</b>	<b>Other Mode</b>								
★	1 pulse / £ 5	MDB Mode						OFF	OFF	
	5 pulse / £ 5	GPT Mode						OFF	ON	
	10 pulse / £ 5	ICT104U Mode						ON	OFF	
	25 pulse / £ 5	ICT104V Mode						ON	ON	

This dip switch is located on the CPU board, remove the CPU board cover first.

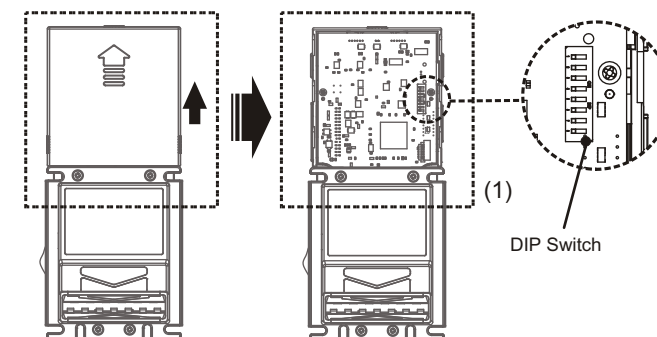

### ★ Manufacture setting

- Note : 1.Please reset the bill acceptor after set the dip switch.  
2.Dip switches 1 to 5 are only used for pulse protocol.  
3.Calibrate card.