


XBA-HKD4 Option Switch Settings

Supported bill HKD 10, 20, 50, 100 4bills.

	FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
	Reject HKD 10	ON							
★	Accept HKD 10	OFF							
	Reject HKD 20		ON						
★	Accept HKD 20		OFF						
	Reject HKD 50			ON					
★	Accept HKD 50			OFF					
	Reject HKD 100				ON				
★	Accept HKD 100				OFF				
	Reserved					ON			
★	Reserved					OFF			
	Disable Bill Reject 4 Times BA Stop By 30 Sec					ON			
★	Enable Bill Reject 4 Times BA Stop By 30 Sec					OFF			
	Stack Banknote when Power-up							ON	
★	Reject Banknote when Power-up							OFF	
	Reserved								ON
★	Reserved								OFF

This dip switch is located at the side of XBA.

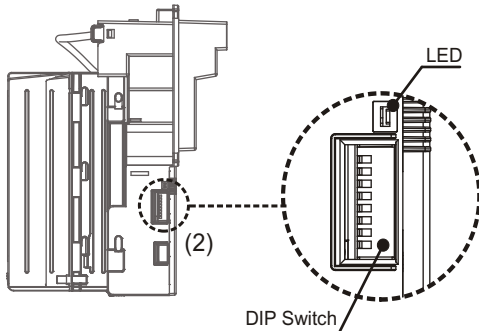


Currency Assign Data

Interface Bill value	ICT104U	Parallel A3	ICT104V	Pulse	MDB
BV1	HKD 10	HKD 10	HKD 10	HKD 10	HKD 10
BV2	HKD 20	HKD 20	HKD 20	HKD 20	HKD 20
BV3	HKD 50	HKD 50	HKD 50	HKD 50	HKD 50
BV4	HKD 100	HKD 100	HKD 100	HKD 100	HKD 100

XBA-HKD4 (Pulse/MDB/GPT/ICT104U/ICT104V)

	FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
	Inhibit Active HIGH	ON							
★	Inhibit Active LOW	OFF							
	Reserved		ON						
★	Reserved		OFF						
	Reserved			ON					
★	Reserved			OFF					
	Reserved				ON				
★	Reserved				OFF				
	Pulse Mode								
	MDB Mode								
	ICT104V Mode								
★	Credit-Pulse Normal HIGH		Scaling Factor (SF) = 100 Decimal Point Position (DPP) = 2			Connect with coin changer	ON		
	Credit-Pulse Normal LOW		Scaling Factor (SF) = 1 Decimal Point Position (DPP) = 0			Connect with ICT VCCS converter board	OFF		
★	Pulse Mode						ON		
	Other Mode						OFF		
★	Pulse Mode								
	Other Mode								
	1 pulse / HKD 10					MDB Mode		OFF	OFF
	5 pulse / HKD 10					GPT Mode		OFF	ON
	10 pulse / HKD 10					ICT104U Mode		ON	OFF
	25 pulse / HKD 10					ICT104V Mode		ON	ON

This dip switch is located on the CPU board, remove the CPU board cover first.

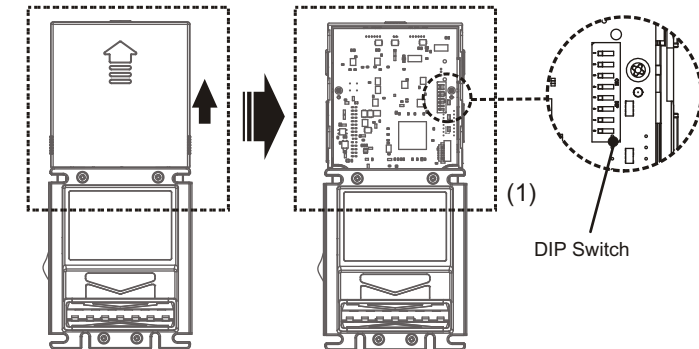

★ Manufacture setting

- Note :
1. Please reset the bill acceptor after set the dip switch.
 2. Dip switches 1 to 5 are only used for pulse protocol.
 3. calibrate card.