


XBA-HRK9(HRK5+EUR4) Option Switch Settings

Supported bill HRK 10, 20, 50, 100, 200 5bills.
 EUR 5, 10, 20, 50 4bills.

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★ Reject HRK 10 & 20 & 50	ON							
★ Accept HRK 10 & 20 & 50	OFF							
★ Reject HRK 100 & 200		ON						
★ Accept HRK 100 & 200		OFF						
★ Reject EUR 5 & 10			ON					
★ Accept EUR 5 & 10			OFF					
★ Reject EUR 20				ON				
★ Accept EUR 20				OFF				
★ Reject EUR 50					ON			
★ Accept EUR 50					OFF			
★ Disable Bill Reject 4 Times BA Stop By 30 Sec						ON		
★ Enable Bill Reject 4 Times BA Stop By 30 Sec						OFF		
★ Stack Banknote when Power-up							ON	
★ Reject Banknote when Power-up							OFF	
★ Reserved								ON
★ Reserved								OFF

This dip switch is located at the side of XBA.

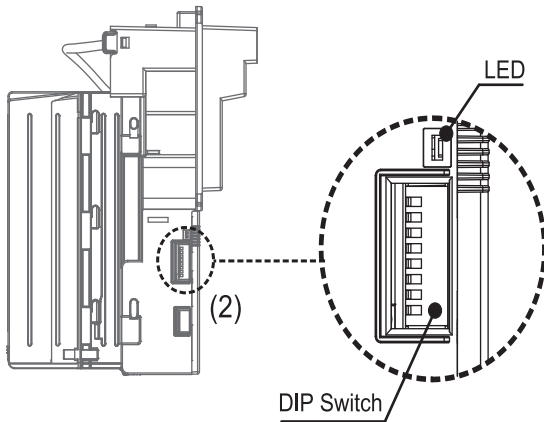


Currency Assign Data

Interface Bill value	ICT104U	ICT104V	Pulse	MDB
BV1	HRK 10	HRK 10	HRK 10	HRK 10
BV2	HRK 20	HRK 20	HRK 20	HRK 20
BV3	HRK 50	HRK 50	HRK 50	HRK 50
BV4	HRK 100	HRK 100	HRK 100	HRK 100
BV5	HRK 200	HRK 200	HRK 200	HRK 200
BV6	EUR 5	EUR 5	EUR 5	EUR 5
BV7	EUR 10	EUR 10	EUR 10	EUR 10
BV8	EUR 20	EUR 20	EUR 20	EUR 20
BV9	EUR 50	EUR 50	EUR 50	EUR 50

XBA-HRK9(HRK5+EUR4) (Pulse/MDB/ICT104U/ICT104V)

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
Inhibit Active HIGH	ON							
Inhibit Active LOW	OFF							
★ Exchange rate 1 EUR = 7 HRK (Note.4)		ON						
★ Exchange rate 1 EUR = 5 HRK (Note.4)		OFF						
★ Reserved			ON					
★ Reserved			OFF					
★ Reserved				ON				
★ Reserved				OFF				
Pulse Mode	MDB Mode		ICT104V Mode					
★ Credit-Pulse Normal HIGH	Scaling Factor (SF) = 100 Decimal Point Position (DPP) = 2		Connect with coin changer		ON			
★ Credit-Pulse Normal LOW	Scaling Factor (SF) = 1 Decimal Point Position (DPP) = 0		Connect with ICT VCCS converter board		OFF			
★ Pulse Mode						ON		
★ Other Mode						OFF		
Pulse Mode	Other Mode							
★ 1 pulse / HRK 5	MDB Mode						OFF	OFF
★ 2 pulses / HRK 5	Reserved						OFF	ON
★ 5 pulses / HRK 5	ICT104U Mode						ON	OFF
★ 10 pulses / HRK 5	ICT104V Mode						ON	ON

This dip switch is located on the CPU board, remove the CPU board cover first.

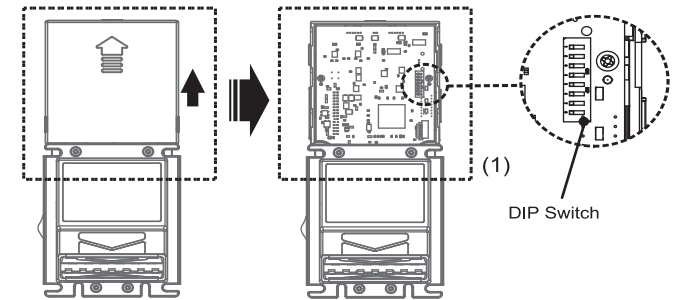

★ Manufacture setting

After setting dip switch of the credit pulses, you should reset the bill acceptor again.

Note: (1) Please reset the bill acceptor after set the dip switch.

(2) Dip switches 1 to 5 are only used for pulse protocol.

(3) Calibration card is needed.

(4) OFF: EUR 5 display HRK 25 (Only for Pulse, MDB)

EUR 10 display HRK 50 (Only for Pulse, MDB)

EUR 20 display HRK 100 (Only for Pulse, MDB)

EUR 50 display HRK 250 (Only for Pulse, MDB)

ON : EUR 5 display HRK 35 (Only for Pulse, MDB)

EUR 10 display HRK 70 (Only for Pulse, MDB)

EUR 20 display HRK 140 (Only for Pulse, MDB)

EUR 50 display HRK 350 (Only for Pulse, MDB)