


XBA-MED10(MKD4+EUR6) Option Switch Settings

Supported bill MKD 10, 50, 100, 200 4bills.
€ 5, 10, 20, 50, 100, 200 6bills.

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★ Reject MKD 10 & 50	ON							
★ Accept MKD 10 & 50	OFF							
★ Reject MKD 100 & 200		ON						
★ Accept MKD 100 & 200		OFF						
★ Reject € 5 & 10			ON					
★ Accept € 5 & 10			OFF					
★ Reject € 20 & 50								
★ Accept € 20 & 50				ON				
★ Reject € 100(2019) & 200(2019)				OFF				
★ Accept € 100(2019) & 200(2019)								
★ Disable Bill Reject 4 Times BA Stop By 30 Sec					ON			
★ Enable Bill Reject 4 Times BA Stop By 30 Sec					OFF			
★ Stack Banknote when Power-up						ON		
★ Reject Banknote when Power-up						OFF		
★ Reserved								ON
★ Reserved								OFF

This dip switch is located at the side of XBA.

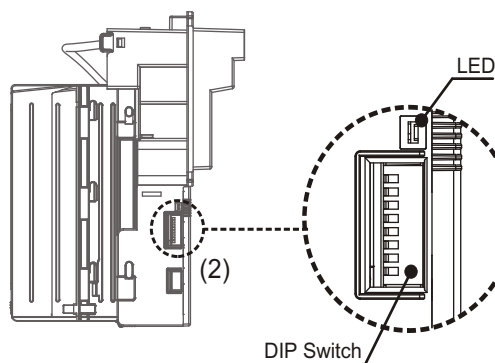

Currency Assign Data

Interface Bill value	ICT104U	GPT	ICT104V	Pulse	MDB
BV1	MKD 10	MKD 10	MKD 10	MKD 10	MKD 10
BV2	MKD 50	MKD 50	MKD 50	MKD 50	MKD 50
BV3	MKD 100	MKD 100	MKD 100	MKD 100	MKD 100
BV4	MKD 200	MKD 200	MKD 200	MKD 200	MKD 200
BV5	€ 5		€ 5	€ 5	€ 5
BV6	€ 10		€ 10	€ 10	€ 10
BV7	€ 20		€ 20	€ 20	€ 20
BV8	€ 50		€ 50	€ 50	
BV9	€ 100		€ 100	€ 100	
BV10	€ 200		€ 200	€ 200	

XBA-MED10(MKD4+EUR6) (Pulse/MDB/ICT104U/GPT/ICT104V)

	FUNCTION	SW1	SW2	SW3	SW4		SW5	SW6	SW7	SW8	
★	Inhibit Active HIGH	ON									
	Inhibit Active LOW	OFF									
	Reserved		ON								
★	Reserved		OFF								
★	50ms LO / 50ms HI			OFF	OFF						
	30ms LO / 50ms HI			ON	OFF						
	60ms LO / 300ms HI			OFF	ON						
	150ms LO / 150ms HI			ON	ON						
	Pulse Mode	MDB Mode			ICT104V Mode						
★	Credit-Pulse Normal HIGH	Scaling Factor (SF)= 100 Decimal Point Position (DPP)= 2			Connect with coin changer		ON				
	Credit-Pulse Normal LOW	Scaling Factor (SF)= 1 Decimal Point Position (DPP)= 0			Connect with ICT VCCS converter board		OFF				
★	Pulse Mode							ON			
	Other Mode							OFF			
	Pulse Mode	Other Mode									
★	1 pulse / MKD 10	MDB Mode							OFF	OFF	
	2 pulses / MKD 10	GPT Mode							OFF	ON	
	5 pulses / MKD 10	ICT104U Mode							ON	OFF	
	10 pulses / MKD 10	ICT104V Mode							ON	ON	

★ Manufacture setting

Note :

- Please reset the bill acceptor after set the dip switch.
- Dip switches 1 to 5 are only used for pulse protocol.
- Calibrate card is needed.
- The transaction Record can be saved by USB MSD(only for EX series)
- EUR \$5 display MKD 31 (Only for Pulse)
EUR \$10 display MKD 62 (Only for Pulse)
EUR \$20 display MKD 124 (Only for Pulse)
EUR \$50 display MKD 310 (Only for Pulse)
EUR \$100 display MKD 620 (Only for Pulse)
EUR \$200 display MKD 1240 (Only for Pulse)
- EUR \$5 display MKD 310 (Only for MDB)
EUR \$10 display MKD 620 (Only for MDB)
EUR \$20 display MKD 1240 (Only for MDB)

This dip switch is located on the CPU board, remove the CPU board cover first.

