


XBA-RUB7

XBA Option Switch Settings(Pulse/MDB/ICT104U/GPT/ICT104V)

Supported bill P. 50, 100, 200, 500, 1000, 2000, 5000 7bills.

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★ Reject P. 50 & 100	ON							
★ Accept P. 50 & 100	OFF							
★ Reject P. 200		ON						
★ Accept P. 200		OFF						
★ Reject P. 500 & 1000			ON					
★ Accept P. 500 & 1000			OFF					
★ Reject P. 2000				ON				
★ Accept P. 2000				OFF				
★ Reject P. 5000					ON			
★ Accept P. 5000					OFF			
★ Disable Bill Reject 4 Times BA Stop By 30 Sec						ON		
★ Enable Bill Reject 4 Times BA Stop By 30 Sec						OFF		
★ Stack Banknote when Power-up							ON	
★ Reject Banknote when Power-up							OFF	
★ Reserved								ON
★ Reserved								OFF

This dip switch is located at the side of XBA.

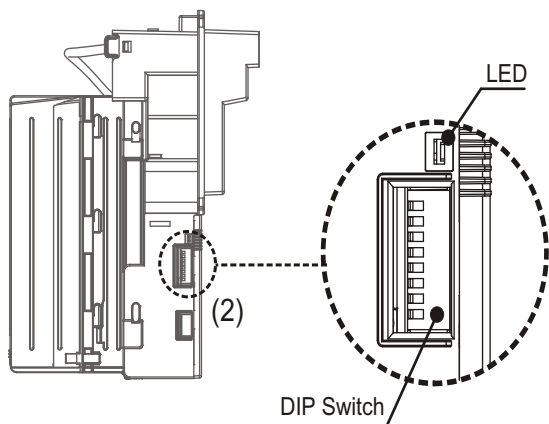


Currency Assign Data

Interface	ICT104U	GPT		ICT104V	Pulse	MDB
		DIP 5 ON	DIP 5 OFF			
Bill value			P. 50			
BV1			P. 50			
BV2	P. 50	P. 50	P. 100	P. 50	P. 50	P. 50
BV3	P. 100	P. 100	P. 200	P. 100	P. 100	P. 100
BV4	P. 500	P. 200	P. 500	P. 500	P. 500	P. 500
BV5	P. 1000			P. 1000	P. 1000	P. 1000
BV6	P. 5000			P. 5000	P. 5000	P. 5000
BV7	P. 200			P. 200	P. 200	P. 200
BV8	P. 2000			P. 2000	P. 2000	P. 2000

XBA-RUB7 (Pulse/MDB/ICT104U/GPT/ICT104V)

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
Inhibit Active HIGH	ON							
★ Inhibit Active LOW	OFF							
ENABLE INHIBIT-Sleep Only		ON						
★ 5 second Timeout Only		OFF						
NORMAL			OFF	OFF				
MODE1			OFF	ON				
MODE2			ON	OFF				
★ MODE1+2			ON	ON				
Pulse Mode	MDB Mode		ICT104V Mode		GPT Mode			
★ Credit-Pulse Normal HIGH	Scaling Factor (SF) = 100 Decimal Point Position (DPP) = 2		Connect with coin changer		Normal (Note.3)		ON	
★ Credit-Pulse Normal LOW	Scaling Factor (SF) = 1 Decimal Point Position (DPP) = 0		Connect with ICT VCCS converter board		Special(Note.3)		OFF	
★ Pulse Mode							ON	
Other Mode							OFF	
Pulse Mode	Other Mode							
★ 1 pulse / P. 50	MDB Mode						OFF	OFF
5 pulse / P. 50	GPT Mode						OFF	ON
10 pulse / P. 50	ICT104U Mode						ON	OFF
25 pulse / P. 50	ICT104V Mode						ON	ON

This dip switch is located on the CPU board, remove the CPU board cover first.

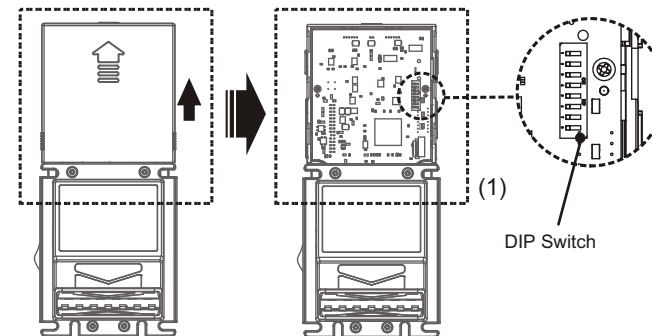

★ Manufacture setting

Note :

1. NORMAL: No sleep function
MODE 1 : Bill-acceptor wakes up VMC with banknote only (special cable required)
MODE 2 : VMC wakes up bill-acceptor
MODE 1+2: Bill-acceptor wakes up with banknote or by VMC
2. Calibrate card
3. When CPU board DIP-SW5 ON : Normal Credit BV2= P.50, BV3= P.100, BV4= P.200
DIP-SW5 OFF : Special Credit BV1= P.50, BV2= P.100, BV3= P.200, BV4= P.500