


XBA-KGS7 Option Switch Settings

Supported bill KGS 20, 50, 100, 200, 500, 1000, 5000 7bills.

	FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
	Reject KGS 20 & 50	ON							
★	Accept KGS 20 & 50	OFF							
	Reject KGS 100 & 200		ON						
★	Accept KGS 100 & 200		OFF						
	Reject KGS 500			ON					
★	Accept KGS 500			OFF					
	Reject KGS 1000				ON				
★	Accept KGS 1000				OFF				
	Reject KGS 5000					ON			
★	Accept KGS 5000					OFF			
	Disable Bill Reject 4 Times BA Stop By 30 Sec						ON		
★	Enable Bill Reject 4 Times BA Stop By 30 Sec						OFF		
	Stack Banknote when Power-up							ON	
★	Reject Banknote when Power-up							OFF	
	Reserved								ON
★	Reserved								OFF

This dip switch is located at the side of XBA.

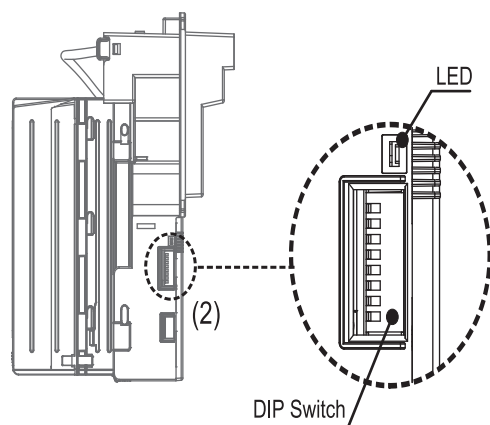

Currency Assign Data

Interface Bill value	Pulse	RS232 A0	ICT104U	ccNet	MDB	
					When Dip 1 is ON	When Dip 1 is OFF
BV1	KGS 20	KGS 20	KGS 20	KGS 20		KGS 20
BV2	KGS 50	KGS 50	KGS 50	KGS 50		KGS 50
BV3	KGS 100	KGS 100	KGS 100	KGS 100	KGS 100	KGS 100
BV4	KGS 200	KGS 200	KGS 200	KGS 200	KGS 200	KGS 200
BV5	KGS 500	KGS 500	KGS 500	KGS 500	KGS 500	KGS 500
BV6	KGS 1000	KGS 1000	KGS 1000	KGS 1000	KGS 1000	KGS 1000
BV7	KGS 5000	KGS 5000	KGS 5000	KGS 5000	KGS 5000	KGS 5000

RS232 A0 INFORMATION

BillType Data	
Code	Denomination
1	KGS 5
2	KGS 10
3	KGS 20
4	KGS 50
5	KGS 100
6	KGS 200
7	KGS 500
8	KGS 1000
9	KGS 5000


Appendix

XBA-KGS7 (Pulse/MDB/RS232 A0/ccNet/ICT104U)

FUNCTION		SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★	Inhibit Active HIGH	ON							
	Inhibit Active LOW	OFF							
★	Reserved		ON						
	Reserved		OFF						
★	Reserved			ON					
	Reserved			OFF					
★	Reserved				ON				
	Reserved				OFF				
★	Pulse Mode	MDB Mode		ccNet Mode					
	Credit-Pulse Normal HIGH	Scaling Factor (SF) = 100 Decimal Point Position(DPP) =2		9600 Baud Rate					
★	Credit-Pulse Normal LOW	Scaling Factor (SF) = 1 Decimal Point Position(DPP) = 0		19200 Baud Rate		OFF			
	Pulse Mode								
★	Other Mode						OFF		
	1 pulse / KGS 10	MDB Mode					OFF		
★	2 pulses / KGS 10	RS232 A0 Mode					OFF	ON	
	5 pulses / KGS 10	ccNet Mode					ON	OFF	
★	20 pulses / KGS 10	ICT104U Mode					ON	ON	

★ Manufacture setting

This dip switch is located on the CPU board, remove the CPU board cover first.

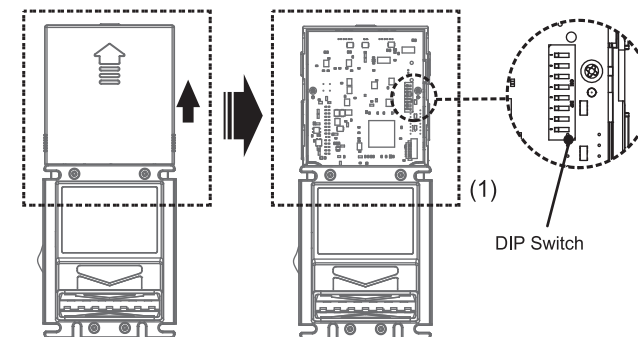

**After setting dip switch of the credit pulses, you should reset the bill acceptor again.

Note : 1.No sleep function.

2.Dip 1 turn OFF (MDB Mode : Reject KGS 5000)

Dip 1 turn ON (MDB Mode : Reject KGS 20 & KGS 50)

3.Calibration card is needed.

4.Pulse Mode : Low = 50ms, High = 300ms