


XBA-RUB8

XBA Option Switch Settings(Pulse/MDB/ICT104U/GPT/ICT104V)

Supported bill P. 10, 50, 100, 200, 500, 1000, 2000, 5000 8bills.

	FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★	Reject P. 10 (Note.4)	ON							
★	Accept P. 10 (Note.4)	OFF							
★	Reject P. 50 & 100 & 200		ON						
★	Accept P. 50 & 100 & 200		OFF						
★	Reject P. 500 & 1000			ON					
★	Accept P. 500 & 1000			OFF					
★	Reject P. 2000				ON				
★	Accept P. 2000				OFF				
★	Reject P. 5000				ON				
★	Accept P. 5000				OFF				
★	Disable Bill Reject 4 Times BA Stop By 30 Sec					ON			
★	Enable Bill Reject 4 Times BA Stop By 30 Sec					OFF			
★	Stack Banknote when Power-up						ON		
★	Reject Banknote when Power-up						OFF		
	Reserved							ON	
★	Reserved							OFF	

This dip switch is located at the side of XBA.

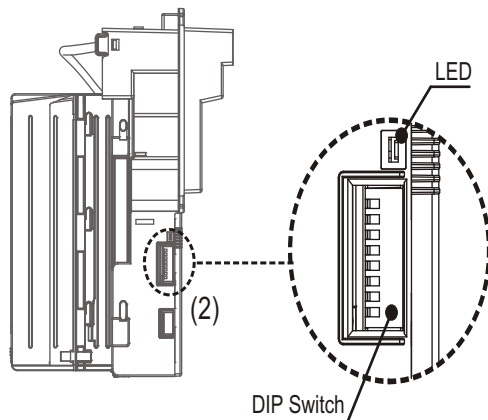


Currency Assign Data

Interface Bill value	ICT104U		GPT		ICT104V		Pulse		MDB	
	DIP 5 ON	DIP 5 OFF	DIP 5 ON	DIP 5 OFF	DIP 5 ON	DIP 5 OFF	DIP 5 ON	DIP 5 OFF	SW1 Dip1 is ON	SW1 Dip1 is OFF
BV1	P. 10	P. 10	P. 50	P. 10	P. 10	P. 10	P. 50	P. 10		
BV2	P. 50	P. 50	P. 100	P. 50	P. 50	P. 50	P. 100	P. 50		
BV3	P. 100	P. 100	P. 200	P. 100	P. 100	P. 100	P. 500	P. 100		
BV4	P. 500	P. 200	P. 500	P. 500	P. 500	P. 500	P. 1000	P. 500		
BV5	P. 1000				P. 1000	P. 1000	P. 5000	P. 1000		
BV6	P. 5000				P. 5000	P. 5000	P. 200			
BV7	P. 200				P. 200	P. 200	P. 2000	P. 200		
BV8	P. 2000				P. 2000	P. 2000		P. 2000		

XBA-RUB8 (Pulse/MDB/ICT104U/GPT/ICT104V)

FUNCTION	SW1	SW2	SW3	SW4	SW5		SW6	SW7	SW8
Inhibit Active HIGH	ON								
Inhibit Active LOW	OFF								
ENABLE INHIBIT-Sleep Only		ON							
5 second Timeout Only		OFF							
NORMAL			OFF	OFF					
MODE1			OFF	ON					
MODE2			ON	OFF					
MODE1+2			ON	ON					
Pulse Mode	MDB Mode		ICT104V Mode		GPT Mode				
Credit-Pulse Normal HIGH	Scaling Factor (SF) = 100 Decimal Point Position (DPP) = 2		Connect with coin changer		Normal (Note.3)		ON		
Credit-Pulse Normal LOW	Scaling Factor (SF) = 1 Decimal Point Position (DPP) = 0		Connect with ICT VCCS converter board		Special(Note.3)		OFF		
Pulse Mode							ON		
Other Mode							OFF		
Pulse Mode	Other Mode								
1 pulse / P. 10(Dip1:OFF) P. 50(Dip1:ON)	MDB Mode						OFF	OFF	
5 pulse / P. 10(Dip1:OFF) P. 50(Dip1:ON)	GPT Mode						OFF	ON	
10 pulse / P. 10(Dip1:OFF) P. 50(Dip1:ON)	ICT104U Mode						ON	OFF	
25 pulse / P. 10(Dip1:OFF) P. 50(Dip1:ON)	ICT104V Mode						ON	ON	

This dip switch is located on the CPU board, remove the CPU board cover first.

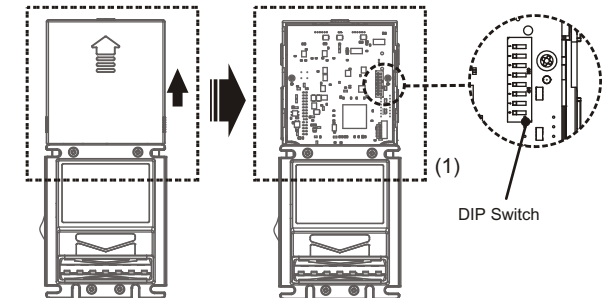

★ Manufacture setting

After setting dip switch of the credit pulses, you should reset the bill acceptor again.
Note :

1. NORMAL: No sleep function
MODE 1 : Bill-acceptor wakes up VMC with banknote only (special cable required)
MODE 2 : VMC wakes up bill-acceptor
MODE 1+2: Bill-acceptor wakes up with banknote or by VMC
2. Calibrate card
3. When CPU board DIP-SW5 ON : Normal Credit BV1= P.10, BV2= P.50, BV3= P.100, BV4= P.200
DIP-SW5 OFF : Special Credit BV1= P.50, BV2= P.100, BV3= P.200, BV4= P.500
4. Pulse Mode: When Dip 1 is OFF, One Pulse per 10 P.
When Dip 1 is ON, One Pulse per 50 P.