

XBA-BGN8(BGN4+EUR4) Option Switch Settings

Supported bill **BGN 5, 10, 20, 50 4bills.**
EUR 5, 10, 20, 50, 4bills.


FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★ Reject BGN 5 & 10	ON							
★ Accept BGN 5 & 10	OFF							
★ Reject BGN 20 & 50		ON						
★ Accept BGN 20 & 50		OFF						
★ Reject EUR 5 & 10			ON					
★ Accept EUR 5 & 10			OFF					
★ Reject EUR 20 & 50				ON				
★ Accept EUR 20 & 50				OFF				
★ Reserved					ON			
★ Reserved					OFF			
★ Disable Bill Reject 4 Times BA Stop By 30 Sec						ON		
★ Enable Bill Reject 4 Times BA Stop By 30 Sec						OFF		
★ Stack Banknote when Power-up							ON	
★ Reject Banknote when Power-up							OFF	
★ Reserved								ON
★ Reserved								OFF

★ Manufacture setting

Currency Assign Data

Interface Bill value	ICT104U	ICT104V	Pulse	MDB
BV1	BGN 5	BGN 5	BGN 5	BGN 5
BV2	BGN 10	BGN 10	BGN 10	BGN 10
BV3	BGN 20	BGN 20	BGN 20	BGN 20
BV4	BGN 50	BGN 50	BGN 50	BGN 50
BV5	EUR 5	EUR 5	EUR 5	EUR 5
BV6	EUR 10	EUR 10	EUR 10	EUR 10
BV7	EUR 20	EUR 20	EUR 20	EUR 20
BV8	EUR 50	EUR 50	EUR 50	EUR 50

This dip switch is located at the side of XBA.

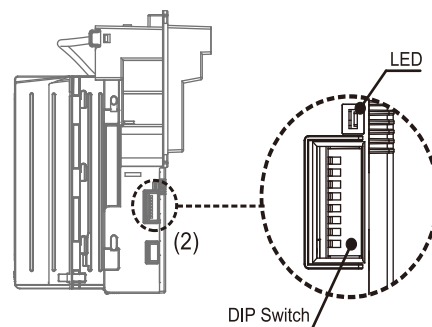

XBA-BGN8(BGN4+EUR4) (Pulse/MDB/ICT104U/ICT104V)

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★ Inhibit Active HIGH	ON							
★ Inhibit Active LOW	OFF							
★ Reserved		ON						
★ Reserved		OFF						
★ Reserved			ON					
★ Reserved			OFF					
★ Reserved				ON				
★ Reserved				OFF				
	Pulse Mode		MDB Mode		ICT104V Mode			
★ Credit-Pulse Normal HIGH	Scaling Factor (SF) = 100 Decimal Point Position (DPP) = 2		Connect with coin changer		ON			
★ Credit-Pulse Normal LOW	Scaling Factor (SF) = 1 Decimal Point Position (DPP) = 0		Connect with ICT JPSTD converter board		OFF			
★ Pulse Mode						ON		
★ Other Mode						OFF		
	Pulse Mode		Other Mode					
★ 1 pulse / BGN 1			MDB Mode				OFF	OFF
★ 5 pulses / BGN 1			Reserved				OFF	ON
★ 10 pulses / BGN 1			ICT104U Mode				ON	OFF
★ 20 pulses / BGN 1			ICT104V Mode				ON	ON

★ Manufacture setting

After setting dip switch of the credit pulses, you should reset the bill acceptor again.

Note : (1) Please reset the bill acceptor after set the dip switch.

(2) Dip switches 1 to 5 are only used for pulse protocol.


(3) Calibration card is needed.

(4) EUR 5 display BGN 9 (Only for Pulse, MDB)

EUR 10 display BGN 18 (Only for Pulse, MDB)

EUR 20 display BGN 36 (Only for Pulse, MDB)

EUR 50 display BGN 90 (Only for Pulse, MDB)

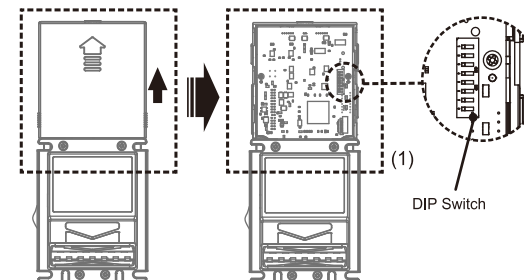

This dip switch is located on the CPU board, remove the CPU board cover first.