


# XBA-PLN6 Option Switch Settings

Supported bill PLN 10, 20, 50, 100, 200, 500 6bills.

| FUNCTION   | SW1 | SW2 | SW3 | SW4 | SW5 | SW6 | SW7 | SW8 |
|--|-----|-----|-----|-----|-----|-----|-----|-----|
| ★ Reject PLN 10 & 20                               | ON  |     |     |     |     |     |     |     |
| ★ Accept PLN 10 & 20                               | OFF |     |     |     |     |     |     |     |
| ★ Reject PLN 50                                    |     | ON  |     |     |     |     |     |     |
| ★ Accept PLN 50                                    |     | OFF |     |     |     |     |     |     |
| ★ Reject PLN 100                                   |     |     | ON  |     |     |     |     |     |
| ★ Accept PLN 100                                   |     |     | OFF |     |     |     |     |     |
| ★ Reject PLN 200                                   |     |     |     | ON  |     |     |     |     |
| ★ Accept PLN 200                                   |     |     |     | OFF |     |     |     |     |
| ★ Reject PLN 500                                   |     |     |     |     | ON  |     |     |     |
| ★ Accept PLN 500                                   |     |     |     |     | OFF |     |     |     |
| ★ Disable Bill Reject 4 Times<br>BA Stop By 30 Sec |     |     |     |     |     | ON  |     |     |
| ★ Enable Bill Reject 4 Times<br>BA Stop By 30 Sec  |     |     |     |     |     | OFF |     |     |
| ★ Stack Banknote when Power-up                     |     |     |     |     |     |     | ON  |     |
| ★ Reject Banknote when Power-up                    |     |     |     |     |     |     | OFF |     |
| ★ Reserved   |     |     |     |     |     |     |     | ON  |
| ★ Reserved   |     |     |     |     |     |     |     | OFF |

This dip switch is located at the side of XBA.

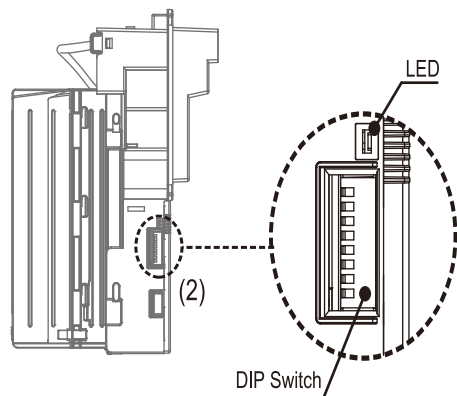


## Currency Assign Data

| Interface<br>Bill value | ICT104U | ICT104V | Pulse   | MDB     |
|-------------------------|---------|---------|---------|---------|
| BV1                     | PLN 10  | PLN 10  | PLN 10  | PLN 10  |
| BV2                     | PLN 20  | PLN 20  | PLN 20  | PLN 20  |
| BV3                     | PLN 50  | PLN 50  | PLN 50  | PLN 50  |
| BV4                     | PLN 100 | PLN 100 | PLN 100 | PLN 100 |
| BV5                     | PLN 200 | PLN 200 | PLN 200 | PLN 200 |
| BV6                     | PLN 500 | PLN 500 | PLN 500 | PLN 500 |

# XBA-PLN6 (Pulse/MDB/ICT104U/ICT104V)

| FUNCTION                   | SW1   | SW2 | SW3                                       | SW4 | SW5 | SW6 | SW7 | SW8 |     |
|----------------------------|---|-----|---|-----|-----|-----|-----|-----|-----|
| Inhibit Active HIGH        | ON  |     |   |     |     |     |     |     |     |
| ★ Inhibit Active LOW       | OFF   |     |   |     |     |     |     |     |     |
| ★ Reserved                 |   | ON  |   |     |     |     |     |     |     |
| ★ Reserved                 |   | OFF |   |     |     |     |     |     |     |
| ★ Reserved                 |   |     | ON  |     |     |     |     |     |     |
| ★ Reserved                 |   |     | OFF                                       |     |     |     |     |     |     |
| ★ Reserved                 |   |     |   | ON  |     |     |     |     |     |
| ★ Reserved                 |   |     |   | OFF |     |     |     |     |     |
| <b>Pulse Mode</b>          | <b>MDB Mode</b>   |     | <b>ICT104V Mode</b>                       |     |     |     |     |     |     |
| ★ Credit-Pulse Normal HIGH | Scaling Factor (SF) = 100<br>Decimal Point Position (DPP) = 2 |     | Connect with coin changer                 |     |     | ON  |     |     |     |
| ★ Credit-Pulse Normal LOW  | Scaling Factor (SF) = 1<br>Decimal Point Position (DPP) = 0   |     | Connect with ICT JPSTD<br>converter board |     |     | OFF |     |     |     |
| ★ Pulse Mode               |   |     |   |     |     | ON  |     |     |     |
| ★ Other Mode               |   |     |   |     |     | OFF |     |     |     |
| <b>Pulse Mode</b>          | <b>Other Mode</b>   |     |   |     |     |     |     |     |     |
| ★ 1 pulse / PLN 10         | MDB Mode  |     |   |     |     |     |     | OFF | OFF |
| ★ 5 pulses / PLN 10        | Reserved  |     |   |     |     |     |     | OFF | ON  |
| ★ 10 pulses / PLN 10       | ICT104U Mode  |     |   |     |     |     |     | ON  | OFF |
| ★ 25 pulses / PLN 10       | ICT104V Mode  |     |   |     |     |     |     | ON  | ON  |

This dip switch is located on the CPU board, remove the CPU board cover first.

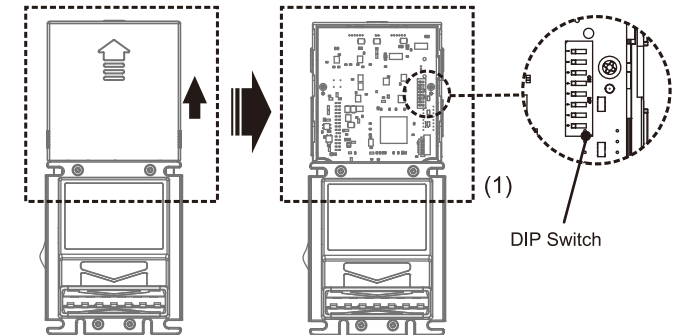

### ★ Manufacture setting

After setting dip switch of the credit pulses, you should reset the bill acceptor again.

Note : 1.Please reset the bill acceptor after set the dip switch.

2.Dip switches 1 to 5 are only used for pulse protocol.

3.Calibration card is needed.