


XBA-PLN8 Option Switch Settings

Supported bill PLN 10, 20, 50, 100, 200 5bills.
 € 5, 10, 20, 3bills.

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★ Reject PLN 10 & 20	ON							
★ Accept PLN 10 & 20	OFF							
★ Reject PLN 50 & 100		ON						
★ Accept PLN 50 & 100		OFF						
★ Reject PLN 200			ON					
★ Accept PLN 200			OFF					
★ Reject € 5 & 10				ON				
★ Accept € 5 & 10				OFF				
★ Reject € 20					ON			
★ Accept € 20					OFF			
★ Disable Bill Reject 4 Times BA Stop By 30 Sec						ON		
★ Enable Bill Reject 4 Times BA Stop By 30 Sec						OFF		
★ Stack Banknote when Power-up							ON	
★ Reject Banknote when Power-up							OFF	
★ Reserved								ON
★ Reserved								OFF

This dip switch is located at the side of XBA.

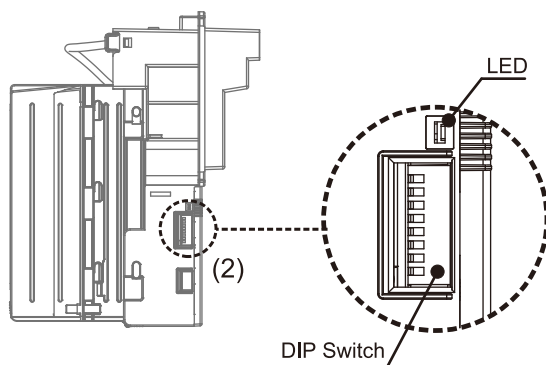


Currency Assign Data

Interface Bill value	ICT104U	ICT104V	Pulse	MDB
BV1	PLN 10	PLN 10	PLN 10	PLN 10
BV2	PLN 20	PLN 20	PLN 20	PLN 20
BV3	PLN 50	PLN 50	PLN 50	PLN 50
BV4	PLN 100	PLN 100	PLN 100	PLN 100
BV5	PLN 200	PLN 200	PLN 200	PLN 200
BV6	€ 5	€ 5	€ 5	€ 5
BV7	€ 10	€ 10	€ 10	€ 10
BV8	€ 20	€ 20	€ 20	€ 20

XBA-PLN8 (Pulse/MDB/ICT104U/ICT104V)

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8	
Inhibit Active HIGH	ON								
★ Inhibit Active LOW	OFF								
★ Reserved		ON							
★ Reserved		OFF							
★ Reserved			ON						
★ Reserved			OFF						
★ Reserved				ON					
★ Reserved				OFF					
Pulse Mode		MDB Mode			ICT104V Mode				
★ Credit-Pulse Normal HIGH	Scaling Factor (SF)= 100 Decimal Point Position (DPP)= 2			Connect with coin changer		ON			
★ Credit-Pulse Normal LOW	Scaling Factor (SF)= 1 Decimal Point Position (DPP)= 0			Connect with ICT JPSTD converter board		OFF			
★ Pulse Mode						ON			
★ Other Mode						OFF			
Pulse Mode		Other Mode							
★ 1 pulse / PLN 10	MDB Mode						OFF	OFF	
5 pulses / PLN 10	Reserved						OFF	ON	
10 pulses / PLN 10	ICT104U Mode						ON	OFF	
25 pulses / PLN 10	ICT104V Mode						ON	ON	

This dip switch is located on the CPU board, remove the CPU board cover first.

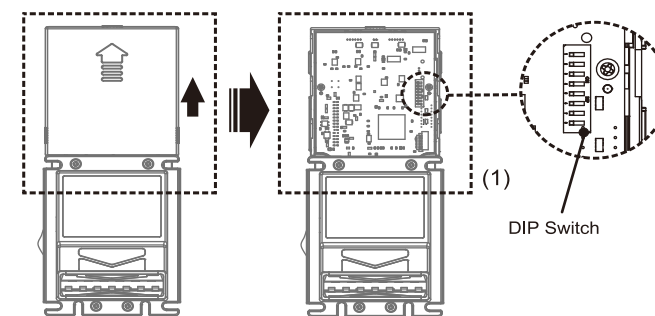

★ Manufacture setting

After setting dip switch of the credit pulses, you should reset the bill acceptor again.

Note : 1. Please reset the bill acceptor after set the dip switch.

2. Dip switches 1 to 5 are only used for pulse protocol.

3. Calibration card is needed.

4. The transaction Record can be saved by USB MSD (only for EX series).

EUR \$5 display PLN \$20 (Only for Pulse, MDB)

EUR \$10 display PLN \$40 (Only for Pulse, MDB)

EUR \$20 display PLN \$80 (Only for Pulse, MDB)