


## XBA-TXY9(TRY3+USD3+EUR3) Option Switch Settings

**Supported bill**    **Lira**    **50, 100, 200**    **3bills.**  
                           **USD**    **1, 5, 10**                    **3bills.**  
                           **EUR**    **5, 10, 20**                    **3bills.**

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★ Reject Lira 50 & 100	ON							
★ Accept Lira 50 & 100	OFF							
★ Reject Lira 200		ON						
★ Accept Lira 200		OFF						
★ Reject € 5 & 10			ON					
★ Accept € 5 & 10			OFF					
★ Reject € 20				ON				
★ Accept € 20				OFF				
★ Reject USD 1 & 5 & 10					ON			
★ Accept USD 1 & 5 & 10					OFF			
★ Disable Bill Reject 4 Times BA Stop By 30 Sec						ON		
★ Enable Bill Reject 4 Times BA Stop By 30 Sec						OFF		
★ Stack Banknote when Power-up							ON	
★ Reject Banknote when Power-up							OFF	
★ Reserved								ON
★ Reserved								OFF

This dip switch is located at the side of XBA.

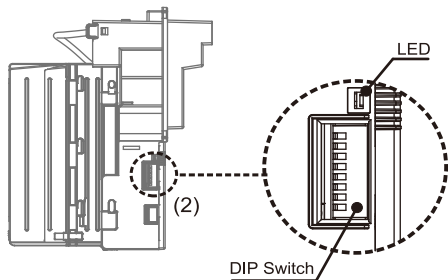

## Currency Assign Data

Interface	ICT104U	ICT104V	Pulse	MDB
BV1	Lira 50	Lira 50	Lira 50	Lira 50
BV2	Lira 100	Lira 100	Lira 100	Lira 100
BV3	Lira 200	Lira 200	Lira 200	Lira 200
BV4	Euro 5	Euro 5	Euro 5	Euro 5
BV5	Euro 10	Euro 10	Euro 10	Euro 10
BV6	Euro 20	Euro 20	Euro 20	Euro 20
BV7	USD 1	USD 1	USD 1	USD 1
BV8	USD 5	USD 5	USD 5	USD 5
BV9	USD 10	USD 10	USD 10	USD 10


## Appendix

## XBA-TXY9(TRY3+USD3+EUR3)(Pulse/MDB/ICT104U/ICT104V)

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
Inhibit Active HIGH	ON							
★ Inhibit Active LOW	OFF							
★ Reserved		ON						
★ Reserved		OFF						
★ Reserved			ON					
★ Reserved			OFF					
★ Reserved				ON				
★ Reserved				OFF				
<b>Pulse Mode</b>		<b>MDB Mode</b>		<b>ICT104V Mode</b>				
★ Credit-Pulse Normal HIGH	Scaling Factor (SF) = 100 Decimal Point Position (DPP) = 2		Connect with coin changer		ON			
★ Credit-Pulse Normal LOW	Scaling Factor (SF) = 1 Decimal Point Position (DPP) = 0		Connect with ICT JPSTD converter board		OFF			
★ Pulse Mode						ON		
★ Other Mode						OFF		
<b>Pulse Mode</b>		<b>Other Mode</b>						
★ 1 pulse / Lira 10	MDB Mode						OFF	OFF
★ 5 pulses / Lira 10	Reserved						OFF	ON
★ 10 pulses / Lira 10	ICT104U Mode						ON	OFF
★ 25 pulses / Lira 10	ICT104V Mode						ON	ON

★ Manufacture setting

This dip switch is located on the CPU board, remove the CPU board cover first.

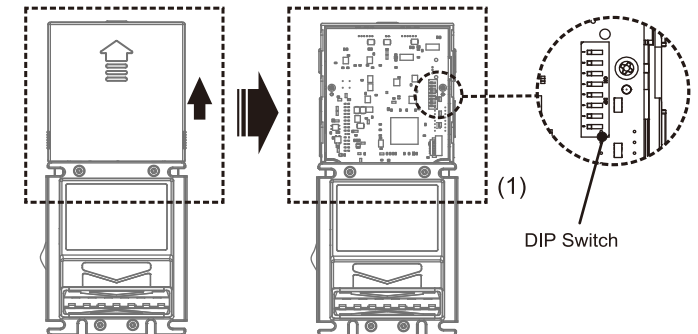

Note : 1.Please reset the bill acceptor after set the dip switch.

2.Calibration card is needed.

EUR \$5 display TRY 250 (Only for Pulse,MDB)

EUR \$10 display TRY 500 (Only for Pulse,MDB)

EUR \$20 display TRY 1000 (Only for Pulse,MDB)

USD \$1 display TRY 40 (Only for Pulse,MDB)

USD \$5 display TRY 200 (Only for Pulse,MDB)

USD \$10 display TRY 400 (Only for Pulse,MDB)