

XBA-32X Option Switch Settings

Supported bill


GHS 1, 2, 5, 10, 20, 50 **6bills.**

EUR 5, 10, 20, 50, 100, 200 **6bills.**

USD 1, 5, 10, 20, 50, 100 **6bills.**

	FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★	Reserved	ON							
★	Reserved	OFF							
★	Reserved		ON						
★	Reserved		OFF						
★	Reserved			ON					
★	Reserved			OFF					
★	Reserved				ON				
★	Reserved				OFF				
★	Reserved					ON			
★	Reserved					OFF			
★	Disable Bill Reject 4 Times BA Stop By 30 Sec						ON		
★	Enable Bill Reject 4 Times BA Stop By 30 Sec						OFF		
★	Stack Banknote when Power-up							ON	
★	Reject Banknote when Power-up							OFF	
★	Reserved								ON
★	Reserved								OFF

This dip switch is located at the side of XBA.

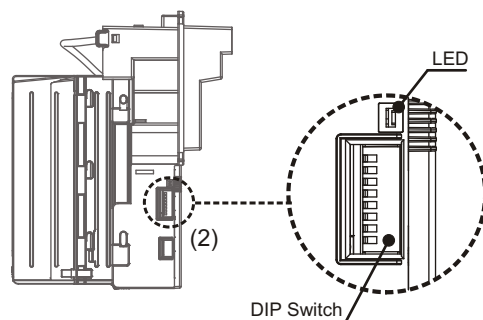

XBA-32X (ICT108U)


	FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★	Reserved	ON							
★	Reserved	OFF							
★	Reserved		ON						
★	Reserved		OFF						
★	Reserved			ON					
★	Reserved			OFF					
★	Reserved				ON				
★	Reserved				OFF				
★	Reserved					ON			
★	Reserved					OFF			
★	ICT108U						ON		
★	Reserved							OFF	

★ Manufacture setting

Note : 1.No sleep function.

2.Calibrate card.

This dip switch is located on the CPU board, remove the CPU board cover first.

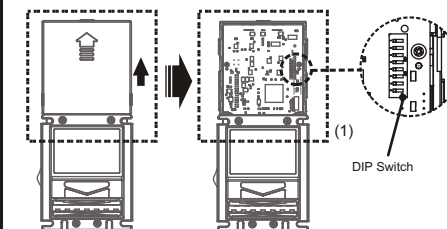

Currency Assign Data

Interface Bill value	ICT108U	Interface Bill value	ICT108U	Interface Bill value	ICT108U
BV1	GHS 1	BV7	EUR 5	BV13	USD 1
BV2	GHS 2	BV8	EUR 10	BV14	USD 5
BV3	GHS 5	BV9	EUR 20	BV15	USD 10
BV4	GHS 10	BV10	EUR 50	BV16	USD 20
BV5	GHS 20	BV11	EUR 100	BV17	USD 50
BV6	GHS 50	BV12	EUR 200	BV18	USD 100