


XBA-EUR4

XBA Option Switch Settings(Pulse/MDB/ICT/Parallel A3)

Supported bill € 5, 10, 20, 50 4bills.

	FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★	Reject € 5	ON							
★	Accept € 5	OFF							
★	Reject € 10		ON						
★	Accept € 10		OFF						
★	Reject € 20			ON					
★	Accept € 20			OFF					
★	Reject € 50				ON				
★	Accept € 50				OFF				
★	Reserved				ON				
★	Reserved				OFF				
★	Disable Bill Reject 4 Times BA Stop By 30 Sec					ON			
★	Enable Bill Reject 4 Times BA Stop By 30 Sec					OFF			
★	Stack Banknote when Power-up							ON	
★	Reject Banknote when Power-up							OFF	
★	ENABLE IrDA Download								ON
★	Reserved								OFF

This dip switch is located at the side of XBA.

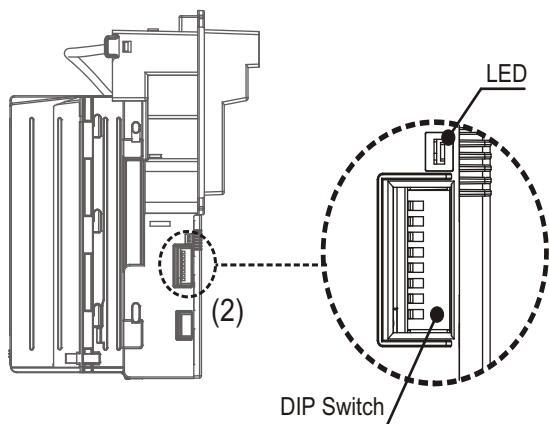


Currency Assign Data

Interface	ICT104U	Parallel A3	ICT104V	Pulse	MDB
Bill value					
BV1	€ 5	€ 5	€ 5	€ 5	€ 5
BV2	€ 10	€ 10	€ 10	€ 10	€ 10
BV3	€ 20	€ 20	€ 20	€ 20	€ 20
BV4	€ 50	€ 50	€ 50	€ 50	€ 50

XBA-EUR4 (Pulse/MDB/ICT/Parallel A3)

FUNCTION		SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★	Inhibit Active HIGH	ON							
	Inhibit Active LOW	OFF							
★	ENABLE INHIBIT-Sleep only								
	5 second Timeout only		OFF						
★	Normal (Note.2)			OFF	OFF				
	Mode 1 (Note.3)			OFF	ON				
	Mode 2 (Note.4)			ON	OFF				
	Mode 1 + 2 (Note.5)			ON	ON				
★	Pulse Mode	MDB Mode							
	Credit-Pulse Normal HIGH	SCALING_FACTOR 100 DECIMAL_PLACE_OFF 2				ON			
	Credit-Pulse Normal LOW	SCALING_FACTOR 1 DECIMAL_PLACE_OFF 0				OFF			
★	Pulse Mode						ON		
	Other Mode						OFF		
★	Pulse Mode	Other Mode							
	1 pulse / € 5	MDB Mode						OFF	OFF
	5 pulse / € 5	Parallel A3 Mode						OFF	ON
	10 pulse / € 5	ICT104U Mode						ON	OFF
	25 pulse / € 5	ICT104V Mode						ON	ON

This dip switch is located on the CPU board, remove the CPU board cover first.

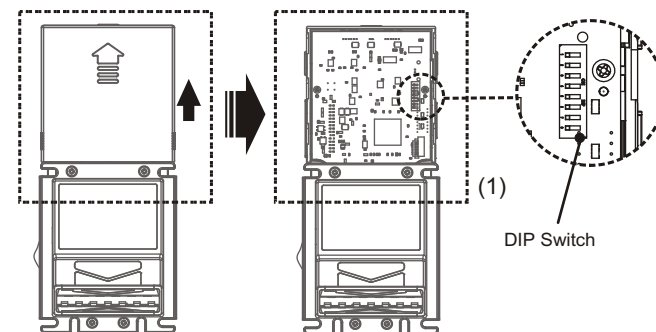

★ Manufacture setting

- Note :
1. After setting dip switch of the credit pulses, you should reset the bill acceptor again.
 2. Normal : No sleep function.
 3. Mode 1 : Bill-acceptor wakes up VMC with banknote only (special cable required).
 4. Mode 2 : VMC wakes up bill-acceptor.
 5. Mode 1+2 : Bill-acceptor wakes up with banknote or by VMC.
 6. Not calibrate card.