


XBA-TXY6(TRY3+USD2+EUR1) Option Switch Settings

Supported bill **Lira** **5, 10, 20,** **3bills.**
 USD **1, 5** **2bills.**
 EUR **5** **1bills.**

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★ Reject Lira 5 & 10	ON							
★ Accept Lira 5 & 10	OFF							
★ Reject Lira 20		ON						
★ Accept Lira 20		OFF						
★ Reject € 5			ON					
★ Accept € 5			OFF					
★ Reject USD 1				ON				
★ Accept USD 1				OFF				
★ Reject USD 5					ON			
★ Accept USD 5					OFF			
★ Disable Bill Reject 4 Times BA Stop By 30 Sec						ON		
★ Enable Bill Reject 4 Times BA Stop By 30 Sec						OFF		
★ Stack Banknote when Power-up							ON	
★ Reject Banknote when Power-up							OFF	
★ Reserved								ON
★ Reserved								OFF

This dip switch is located at the side of XBA.

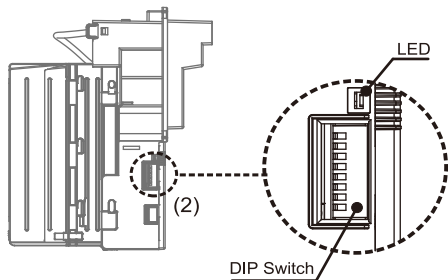


Currency Assign Data

Interface Bill value	ICT104U	ICT104V	Pulse	MDB
BV1	Lira 5	Lira 5	Lira 5	Lira 5
BV2	Lira 10	Lira 10	Lira 10	Lira 10
BV3	Lira 20	Lira 20	Lira 20	Lira 20
BV4	Euro 5	Euro 5	Euro 5	Euro 5
BV5	USD 1	USD 1	USD 1	USD 1
BV6	USD 5	USD 5	USD 5	USD 5

XBA-TXY6(TRY3+USD2+EUR1)(Pulse/MDB/ICT104U/ICT104V)

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8	
Inhibit Active HIGH	ON								
★ Inhibit Active LOW	OFF								
★ Reserved		ON							
★ Reserved		OFF							
★ Reserved			ON						
★ Reserved			OFF						
★ Reserved				ON					
★ Reserved				OFF					
Pulse Mode		MDB Mode		ICT104V Mode					
★ Credit-Pulse Normal HIGH	Scaling Factor (SF) = 100 Decimal Point Position (DPP) = 2		Connect with coin changer				ON		
★ Credit-Pulse Normal LOW	Scaling Factor (SF) = 1 Decimal Point Position (DPP) = 0		Connect with ICT JPSTD converter board				OFF		
★ Pulse Mode					ON				
★ Other Mode					OFF				
Pulse Mode		Other Mode							
★ 1 pulse / Lira 1	MDB Mode						OFF	OFF	
★ 5 pulses / Lira 1	Reserved						OFF	ON	
★ 10 pulses / Lira 1	ICT104U Mode						ON	OFF	
★ 25 pulses / Lira 1	ICT104V Mode						ON	ON	

This dip switch is located on the CPU board, remove the CPU board cover first.

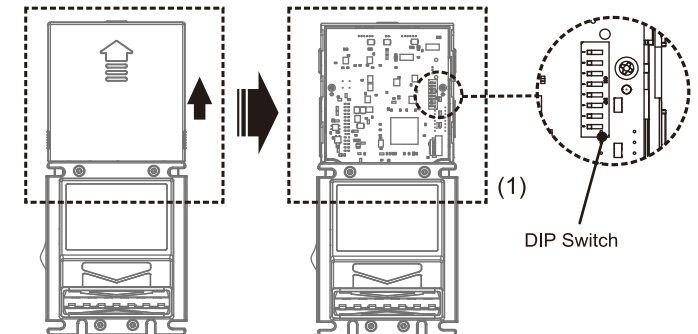

★ Manufacture setting

Note : 1.Please reset the bill acceptor after set the dip switch.

2.Calibration card is needed.

EUR \$5 display TRY 110 (Only for Pulse,MDB)

USD \$1 display TRY 20 (Only for Pulse,MDB)

USD \$5 display TRY 100 (Only for Pulse,MDB)